

# Transfer



# Content – Transfer

## Ducts



|            |     |
|------------|-----|
| SRTR.....  | 479 |
| TSRTR..... | 480 |

## Slide-on stub Telescopic duct



|             |     |
|-------------|-----|
| ILRTR ..... | 481 |
| LRTR .....  | 482 |
| PTR .....   | 483 |
| TLTR1 ..... | 484 |
| TLTR2 ..... | 485 |

## Bends



|               |     |
|---------------|-----|
| BTR 90° ..... | 487 |
| BTR 60° ..... | 488 |
| BTR 45° ..... | 489 |
| BTR 30° ..... | 490 |
| BTR 15° ..... | 491 |



|                |     |
|----------------|-----|
| BSTR 90° ..... | 492 |
| BSTR 60° ..... | 493 |
| BSTR 45° ..... | 494 |
| BSTR 30° ..... | 495 |
| BSTR 15° ..... | 496 |



|                 |     |
|-----------------|-----|
| BSFTR 90° ..... | 497 |
| BSFTR 60° ..... | 498 |
| BSFTR 45° ..... | 499 |
| BSFTR 30° ..... | 500 |
| BSFTR 15° ..... | 501 |

## Reducer



|             |     |
|-------------|-----|
| RCLTR ..... | 502 |
|-------------|-----|

## T-piece



|              |     |
|--------------|-----|
| TVTR30 ..... | 504 |
|--------------|-----|

## X-piece



|              |     |
|--------------|-----|
| XVTR30 ..... | 505 |
|--------------|-----|

## Y-piece



|              |     |
|--------------|-----|
| YVTR30 ..... | 506 |
|--------------|-----|

## Saddle Collar saddle



|              |     |
|--------------|-----|
| PSVTR30..... | 507 |
| PSTR.....    | 508 |

## Take-off



|            |     |
|------------|-----|
| ILTR ..... | 511 |
|------------|-----|

## End cover



|            |     |
|------------|-----|
| EPTR ..... | 512 |
|------------|-----|

## Transition pieces



|            |     |
|------------|-----|
| OUTR.....  | 513 |
| MFTR.....  | 514 |
| OTR .....  | 515 |
| LORTR..... | 516 |

## Extraction hoods



|            |     |
|------------|-----|
| SH.....    | 517 |
| SHTR ..... | 518 |
| SPTR ..... | 519 |

## Waste extractor



|            |     |
|------------|-----|
| GSTR ..... | 520 |
|------------|-----|

## Flexible hoses



|             |     |
|-------------|-----|
| THTR .....  | 521 |
| THVTR ..... | 522 |

## Transition piece (to hose)



|            |     |
|------------|-----|
| OTRTH..... | 523 |
|------------|-----|

## Clips



|            |     |
|------------|-----|
| SB.....    | 524 |
| SB1.....   | 525 |
| SB-2 ..... | 526 |

## Sealing clamp



|          |     |
|----------|-----|
| MFK..... | 527 |
|----------|-----|

## Sliding dampers



|                                          |     |
|------------------------------------------|-----|
| See chapter<br>Dampers and Measure units |     |
| SKMTR .....                              | 325 |
| SKPTR.....                               | 326 |

# Description

## Transfer – the duct system which is quick and easy to assemble and take apart

Transfer is the circular duct system with tension clips for quick assembly and disassembly. The system is supplied as standard with clips in dimensions Ø80 to Ø500 and with FL flanges in dimensions Ø560 to Ø900. Please refer to page 491.

### Dust explosions

There is always a risk of dust explosion in installations where finely-divided material is transported.

A dust explosion occurs when a critical mixture of finely divided material and air is ignited and burns rapidly with consequent rapid expansion and pressure rise. A common cause of ignition is a spark from electrostatic discharge. Dust and sawdust extraction installations must be designed to minimise sources of fire and explosion.

### Noise

In particle transport systems, where the pressure difference between in- and outside is big and where a little leakage may cause noise, the joints ought to be taped if low noise levels are required.

### Applications

The duct system is suitable for

- Particle transportation from woodworking, such as saw mills, carpenters, furniture manufacturers and craft workshops.
- Comfort ventilation.
- Extraction systems for better working environment.
- Plasma cutters.
- Specially designed ventilation plants where you have extra demands for form, colour and appearance.

Please contact Electromec if you need other applications or to transport other materials, and if there are special operation circumstances.

## Mountings


The types of mountings and their distances shall be chosen so that no sagging occurs in the system, and as justified for safe installation.

## Maintenance

The duct system does not normally need any maintenance, but regular checks for wear should be made.


## Advantages of the Transfer system

- Facilitates inspection and cleaning thanks to quick and simple disassembly.
- Facilitates environmental checking of the duct system.
- Rational joining, without screws or blind rivets.
- Has well-protected seal mouldings inside the clips.
- Can be twisted and adjusted after installation.
- Gives straight assembly.
- Does not have any sharp edges in the joints, since the bead is swaged directly on the fittings.
- Is highly suitable for transporting light material by means of air (chip extraction).
- Thanks to the bead, components are round and stiff.
- Does not require couplings.
- Transition pieces available for the Safe systems etc.
- Has lower pressure drop than the Safe system.
- Quick and easy to assemble and disassemble.

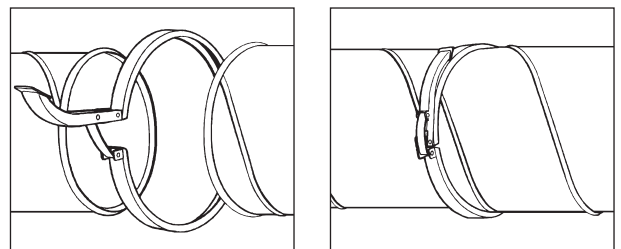


# General

## Dimensions of ducts and fittings



| Ød<br>nom            | Ød<br>mm | v<br>mm |
|----------------------|----------|---------|
| 80                   | 78       | 6       |
| 100                  | 98       | 6       |
| 125                  | 123      | 6       |
| 140                  | 138      | 6       |
| 150                  | 148      | 6       |
| 160                  | 158      | 6       |
| 180                  | 178      | 8       |
| 200                  | 198      | 8       |
| 224                  | 224      | 8       |
| 250                  | 250      | 8       |
| 300                  | 300      | 10      |
| 315                  | 315      | 10      |
| 350                  | 350      | 10      |
| 400                  | 400      | 10      |
| 450                  | 450      | 10      |
| 500                  | 500      | 10      |
| 560–900 with flanges |          |         |

## Angle tolerances



# Spiral swaged duct

SRTR



## Description


Circular spiral swaged duct with projecting seam.

The duct has end stubs swaged on, with Transfer beads at each end.

Please refer to page 56 for technical data about ducts.

Please refer to pages 56 for technical data about ducts.

## Dimensions

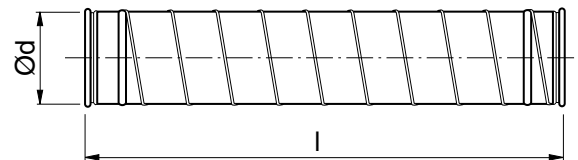

| Ød<br>nom                       | t<br>std<br>mm | 500<br>mm | 1000<br>mm | 1500<br>mm | 2000<br>mm | 3000<br>mm | 6000<br>mm |
|---------------------------------|----------------|-----------|------------|------------|------------|------------|------------|
| Weight for standard lengths, kg |                |           |            |            |            |            |            |
| 80                              | 0,45           | 0,55      | 1,10       | 1,65       | 2,20       | 3,30       | 6,60       |
| 100                             | 0,45           | 0,74      | 1,37       | 2,11       | 2,74       | 4,11       | 8,22       |
| 125                             | 0,45           | 0,82      | 1,64       | 2,46       | 3,28       | 4,92       | 9,84       |
| 140                             | 0,5            | 1,00      | 2,00       | 3,00       | 4,00       | 6,00       | 12,0       |
| 150                             | 0,5            | 1,10      | 2,20       | 3,30       | 4,40       | 6,60       | 13,2       |
| 160                             | 0,5            | 1,20      | 2,30       | 3,50       | 4,60       | 6,90       | 13,8       |
| 180                             | 0,5            | 1,30      | 2,60       | 3,90       | 5,20       | 7,80       | 15,6       |
| 200                             | 0,5            | 1,40      | 2,90       | 4,30       | 5,80       | 8,70       | 17,4       |
| 224                             | 0,6            | 1,90      | 3,80       | 5,80       | 7,70       | 11,5       | 23,0       |
| 250                             | 0,5            | 1,80      | 3,60       | 5,40       | 7,20       | 10,8       | 21,6       |
| 300                             | 0,6            | 2,60      | 5,20       | 7,80       | 10,4       | 15,6       | 31,2       |
| 315                             | 0,6            | 2,80      | 5,50       | 8,30       | 11,0       | 16,5       | 33,0       |
| 350                             | 0,6            | 3,10      | 6,20       | 9,30       | 12,4       | 18,6       | 37,2       |
| 400                             | 0,6            | 3,50      | 7,00       | 10,5       | 14,0       | 21,0       | 42,0       |
| 450                             | 0,6            | 3,90      | 7,80       | 11,7       | 15,6       | 23,4       | 46,8       |
| 500                             | 0,7            | 5,10      | 10,2       | 15,2       | 20,3       | 30,5       | 60,9       |
| 560 *                           | 0,8            | 11,7      | 18,2       | 24,7       | 31,2       | 44,2       | 83,3       |
| 600 *                           | 0,8            | 12,5      | 19,5       | 26,5       | 33,4       | 47,4       | 89,2       |
| 630 *                           | 0,7            | 11,3      | 17,6       | 23,9       | 30,2       | 42,8       | 80,6       |
| 710 *                           | 0,8            | 14,8      | 23,0       | 31,2       | 39,4       | 55,9       | 105        |
| 800 *                           | 0,8            | 16,5      | 25,7       | 35,1       | 44,4       | 63,0       | 119        |
| 900 *                           | 0,8            | 17,8      | 28,3       | 38,8       | 49,2       | 70,2       | 133        |

\* Supplied with flange FL

## Ordering example

|              |             |            |             |
|--------------|-------------|------------|-------------|
|              | <b>SRTR</b> | <b>200</b> | <b>3000</b> |
| Product      |             |            |             |
| Dimension Ød |             |            |             |
| Length l     |             |            |             |

# Slide-on stub

TSRTR



### Description

Slide-on stub for installation in ducts of type SR.

After the duct has been shortened/fitted, add sealant etc between the swaged seams on the slide-on stub, after which the slide-on stub is inserted into the duct. The two swaged seams guide and retain the slide-on stub.

To finish off, the edge of the stub is swaged, both to remove the sharp edge of the transition and to fix the slide-on stub.


Please refer to the shortening instruction on page 486.

Is also used as transition piece OTRTH between Transfer and flexible hose THVTR. See page 522.

Please refer to the shortening instruction on page 486.

Is also used as transition piece OTRTH between Transfer and flexible hose THVTR. See page 522.

### Dimensions



| Ød<br>nom | t<br>mm | l<br>mm | li<br>mm | m<br>kg |
|-----------|---------|---------|----------|---------|
| 80        | 0,7     | 18      | 44       | 0,10    |
| 100       | 0,7     | 18      | 44       | 0,10    |
| 125       | 0,7     | 18      | 44       | 0,20    |
| 140       | 0,7     | 18      | 44       | 0,20    |
| 150       | 0,7     | 18      | 44       | 0,20    |
| 160       | 0,7     | 18      | 44       | 0,20    |
| 180       | 0,7     | 20      | 37       | 0,30    |
| 200       | 0,7     | 20      | 37       | 0,30    |
| 224       | 0,7     | 20      | 37       | 0,30    |
| 250       | 0,7     | 20      | 37       | 0,30    |
| 300       | 0,9     | 22      | 32       | 0,40    |
| 315       | 0,9     | 22      | 32       | 0,50    |
| 350       | 0,9     | 22      | 32       | 0,50    |
| 400       | 0,9     | 22      | 32       | 0,70    |
| 450       | 0,9     | 22      | 32       | 0,80    |
| 500       | 0,9     | 22      | 32       | 0,90    |

### Ordering example

|              |       |     |
|--------------|-------|-----|
| Product      | TSRTR | 200 |
| Dimension Ød |       |     |

# Slide-on stub

ILRTR



## Description

Slide-on stub for installation in ducts of type SR in dimension range Ø560–900 where flange FL is used for joining.


After the duct has been shortened/fitted, add sealant etc between the swaged seams on the slide-on stub, after which the slide-on stub is inserted into the duct. The two swaged seams guide and retain the slide-on stub.

To finish off, the edge of the stub is swaged to both remove the sharp edge of the transition, and to fix the slide-on stub.

Please refer to the shortening instruction on page 486.

Please refer to the shortening instruction on page 486.

## Dimensions

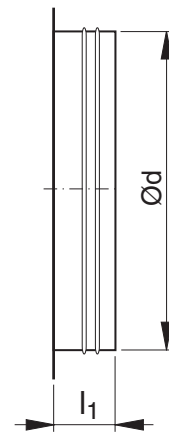

| Ød<br>nom | l <sub>1</sub><br>mm | m<br>kg |
|-----------|----------------------|---------|
| 560       | 80                   | 0,90    |
| 600       | 80                   | 1,00    |
| 630       | 80                   | 1,00    |
| 710       | 100                  | 1,40    |
| 800       | 100                  | 2,00    |
| 900       | 100                  | 2,20    |

## Ordering example

|              |       |     |
|--------------|-------|-----|
| Product      | ILRTR | 800 |
| Dimension Ød |       |     |

# Lengthways swaged duct

LRTR



## Description

Circular lengthways swaged duct with external seam.

| Ød<br>nom | t<br>std<br>mm | 1000 mm<br>Max permissible static negative<br>pressure, kPa | 2000 mm | 3000 mm |
|-----------|----------------|-------------------------------------------------------------|---------|---------|
| 80        | 0,6            | 36,0                                                        |         |         |
| 100       | 0,6            | 34,0                                                        | 25,0    |         |
| 125       | 0,6            | 32,0                                                        | 24,0    |         |
| 140       | 0,6            | 29,0                                                        | 21,0    |         |
| 150       | 0,6            | 25,0                                                        | 18,0    |         |
| 160       | 0,6            | 22,0                                                        | 16,0    |         |
| 180       | 0,7            | 21,0                                                        | 15,5    |         |
| 200       | 0,7            | 21,0                                                        | 15,0    |         |
| 224       | 0,7            | 20,0                                                        | 14,5    |         |
| 250       | 0,7            | 19,5                                                        | 14,0    | 10,0    |
| 300       | 0,7            | 18,5                                                        | 13,5    | 9,5     |
| 315       | 0,7            | 18,0                                                        | 13,0    | 9,0     |
| 350       | 0,7            | 16,0                                                        | 12,0    | 8,0     |
| 400       | 0,9            | 19,0                                                        | 14,0    | 8,5     |
| 450       | 0,9            | 16,0                                                        | 12,0    | 7,0     |
| 500       | 0,9            | 14,0                                                        | 10,0    | 6,0     |
| 560       | 0,9            |                                                             |         |         |
| 600       | 0,9            |                                                             |         |         |
| 630       | 0,9            |                                                             |         |         |
| 650       | 0,9            |                                                             |         |         |
| 710       | 0,9            |                                                             |         |         |
| 750       | 0,9            |                                                             |         |         |
| 800       | 0,9            |                                                             |         |         |
| 900       | 0,9            |                                                             |         |         |

## Dimensions



| Ød<br>nom                       | t<br>std<br>mm | 500<br>mm | 1000<br>mm | 1500<br>mm | 2000<br>mm | 2960**<br>mm |
|---------------------------------|----------------|-----------|------------|------------|------------|--------------|
| Weight for standard lengths, kg |                |           |            |            |            |              |
| 80                              | 0,6            | 0,70      | 1,30       |            |            |              |
| 100                             | 0,6            | 0,80      | 1,68       | 2,50       | 3,40       |              |
| 125                             | 0,6            | 1,00      | 2,09       | 3,10       | 4,20       |              |
| 140                             | 0,6            | 1,10      | 2,29       | 3,40       | 4,60       |              |
| 150                             | 0,6            | 1,20      | 2,49       | 3,70       | 5,00       |              |
| 160                             | 0,6            | 1,30      | 2,69       | 4,00       | 5,40       |              |
| 180                             | 0,7            | 1,80      | 3,6        | 5,40       | 7,20       |              |
| 200                             | 0,7            | 1,90      | 3,89       | 5,80       | 7,80       |              |
| 224                             | 0,7            | 2,20      | 4,4        | 6,60       | 8,80       |              |
| 250                             | 0,7            | 2,40      | 4,88       | 7,30       | 9,80       | 14,6*        |
| 300                             | 0,7            | 2,90      | 5,88       | 8,80       | 11,8       | 17,6**       |
| 315                             | 0,7            | 3,10      | 6,2        | 9,30       | 12,4       | 18,6**       |
| 350                             | 0,7            | 3,50      | 7          | 10,5       | 14,0       | 21,0**       |
| 400                             | 0,9            | 4,70      | 9,4        | 14,1       | 18,8       | 28,2**       |
| 450                             | 0,9            | 5,30      | 10,6       | 15,9       | 21,2       | 31,8**       |
| 500                             | 0,9            | 5,90      | 11,8       | 17,7       | 23,6       | 35,4**       |
| 560***                          | 0,9            | 11,8      | 18,4       | 25,0       |            |              |
| 600***                          | 0,9            | 12,6      | 19,7       | 26,7       |            |              |
| 630***                          | 0,9            | 13,2      | 20,7       | 27,1       |            |              |
| 650***                          | 0,9            | 13,6      | 21,3       | 28,9       |            |              |
| 710***                          | 0,9            | 14,9      | 23,3       | 31,6       |            |              |
| 750***                          | 0,9            | 15,7      | 24,6       | 33,4       |            |              |
| 800***                          | 0,9            | 16,6      | 26,1       | 35,5       |            |              |
| 900***                          | 0,9            | 18,8      | 29,4       | 40,0       |            |              |

\* t = 0,9; l = 2970

\*\* t = 0,9

\*\*\* Supplied with flange FL

## Ordering example

|              |      |     |      |
|--------------|------|-----|------|
|              | LRTR | 200 | 2000 |
| Product      |      |     |      |
| Dimension Ød |      |     |      |
| Length l     |      |     |      |



# Slide-on stub

PTR



## Description

Slide-on stub for installation in ducts of type LRTR.


After the duct has been shortened/fitted the slide-on stub is inserted into the duct, after which the slide-on stub is sealed and fixed with putty or an sealing clamp such as MFK.

Turn the join during assembly, to face away from the direction of air flow.

Please refer to the shortening instruction on page 486.

Please refer to the shortening instruction on page 486.

## Dimensions



| Ød<br>nom | t<br>mm | l<br>mm | m<br>kg |
|-----------|---------|---------|---------|
| 80        | 0,5     | 58      | 0,20    |
| 100       | 0,5     | 58      | 0,20    |
| 125       | 0,5     | 58      | 0,30    |
| 140       | 0,5     | 58      | 0,30    |
| 150       | 0,5     | 58      | 0,40    |
| 160       | 0,6     | 58      | 0,40    |
| 180       | 0,6     | 53      | 0,40    |
| 200       | 0,6     | 53      | 0,40    |
| 224       | 0,6     | 53      | 0,40    |
| 250       | 0,6     | 53      | 0,30    |
| 300       | 0,6     | 49      | 0,60    |
| 315       | 0,6     | 49      | 0,40    |
| 350       | 0,6     | 49      | 0,80    |
| 400       | 0,7     | 49      | 1,20    |
| 450       | 0,7     | 49      | 1,30    |
| 500       | 0,7     | 49      | 1,50    |

Folded design

## Ordering example

|              |     |     |
|--------------|-----|-----|
| Product      | PTR | 200 |
| Dimension Ød |     |     |

# Telescopic duct

TLTR1




## Description

Used together with telescopic duct TLTR 2 where it is necessary to adjust duct length when the standard lengths are not sufficient.

Fits also inside ducts of type SRTR Ø 80–200 and LRTR Ø 80–500.

## Dimensions

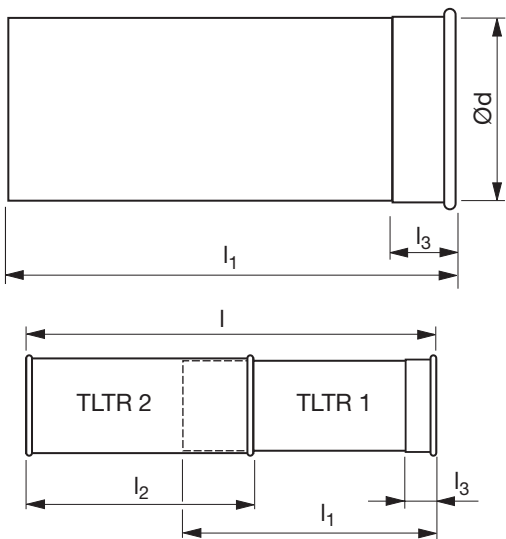


| Ød<br>nom | t<br>mm | l <sub>1</sub> , l <sub>2</sub><br>mm | l <sub>3</sub><br>mm | l <sub>min</sub><br>mm | l <sub>max</sub><br>mm | m<br>kg |
|-----------|---------|---------------------------------------|----------------------|------------------------|------------------------|---------|
| 80        | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,40    |
| 100       | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,45    |
| 125       | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,55    |
| 140       | 0,7     | 220                                   | 60                   | 280                    | 410                    | 0,60    |
| 150       | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,65    |
| 160       | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,70    |
| 180       | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,80    |
| 200       | 0,7     | 350                                   | 30                   | 380                    | 670                    | 1,35    |
| 224       | 0,7     | 350                                   | 30                   | 380                    | 670                    | 1,50    |
| 250       | 0,7     | 350                                   | 30                   | 380                    | 670                    | 1,70    |
| 300       | 0,7     | 350                                   | 60                   | 410                    | 670                    | 2,05    |
| 315       | 0,7     | 350                                   | 30                   | 380                    | 670                    | 2,15    |
| 350       | 0,7     | 350                                   | 60                   | 410                    | 670                    | 2,40    |
| 400       | 0,9     | 350                                   | 60                   | 410                    | 670                    | 3,30    |
| 450       | 0,9     | 350                                   | 60                   | 410                    | 670                    | 3,70    |
| 500       | 0,9     | 350                                   | 60                   | 410                    | 670                    | 4,10    |

Seal the joint after assembly by using either:

- Mastic or tape
- O-ring ORINGTR + clip SB or SB-2

## Ordering example

|              |       |     |
|--------------|-------|-----|
| Product      | TLTR1 | 250 |
| Dimension Ød |       |     |

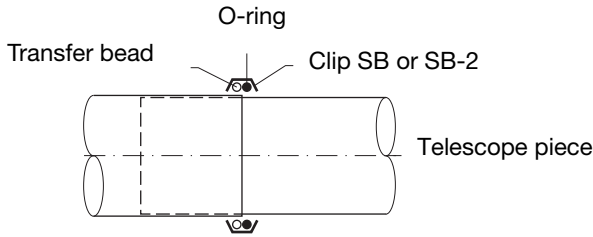

# Telescopic duct

# TLTR2




## Description

Used together with telescopic duct TLTR 1 where it is necessary to adjust duct length when the standard lengths are not sufficient.

Can also be used as an ordinary duct.


## Dimensions

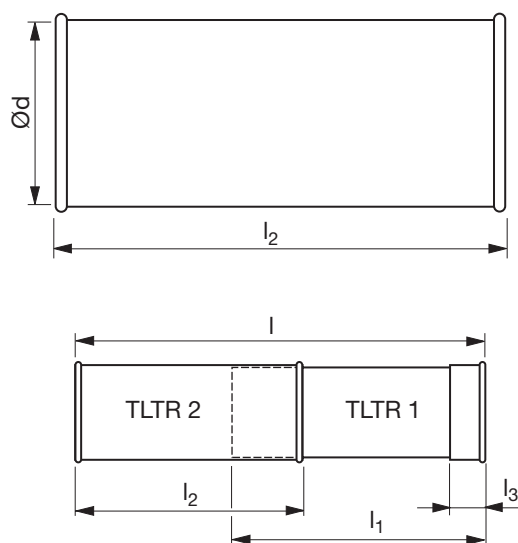

| Ød<br>nom | t<br>mm | l <sub>1</sub> , l <sub>2</sub><br>mm | l <sub>3</sub><br>mm | l <sub>min</sub><br>mm | l <sub>max</sub><br>mm | m<br>kg |
|-----------|---------|---------------------------------------|----------------------|------------------------|------------------------|---------|
| 80        | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,40    |
| 100       | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,45    |
| 125       | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,55    |
| 140       | 0,7     | 220                                   | 60                   | 280                    | 410                    | 0,60    |
| 150       | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,65    |
| 160       | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,70    |
| 180       | 0,7     | 220                                   | 30                   | 250                    | 410                    | 0,80    |
| 200       | 0,7     | 350                                   | 30                   | 380                    | 670                    | 1,35    |
| 224       | 0,7     | 350                                   | 30                   | 380                    | 670                    | 1,50    |
| 250       | 0,7     | 350                                   | 30                   | 380                    | 670                    | 1,70    |
| 300       | 0,7     | 350                                   | 60                   | 410                    | 670                    | 2,05    |
| 315       | 0,7     | 350                                   | 30                   | 380                    | 670                    | 2,15    |
| 350       | 0,7     | 350                                   | 60                   | 410                    | 670                    | 2,40    |
| 400       | 0,9     | 350                                   | 60                   | 410                    | 670                    | 3,30    |
| 450       | 0,9     | 350                                   | 60                   | 410                    | 670                    | 3,70    |
| 500       | 0,9     | 350                                   | 60                   | 410                    | 670                    | 4,10    |

Seal the joint after assembly by using either:

- Mastic or tape
- O-ring ORINGTR + clip SB or SB-2

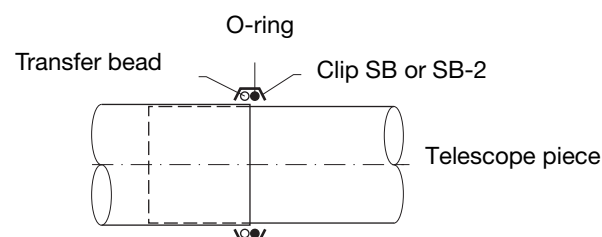


## Ordering example

|              |       |     |
|--------------|-------|-----|
| Product      | TLTR2 | 250 |
| Dimension Ød |       |     |


# Instruction for shortening for length adaptation of Transfer ducts

## Spiral swaged duct SRTR

### Adaption with fixed length

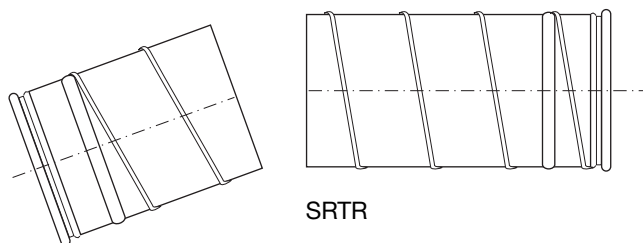


Shorten the duct to the desired length. Also consider the installation length of the slide-on stub.

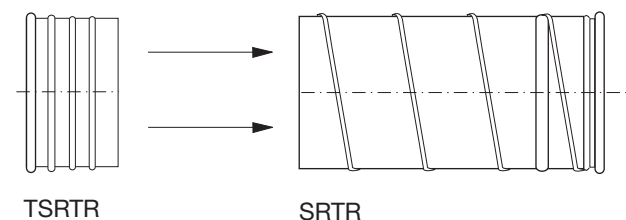


Install slide-on stub TSRTTR (please refer to page 480).

### Adaption with flexible length

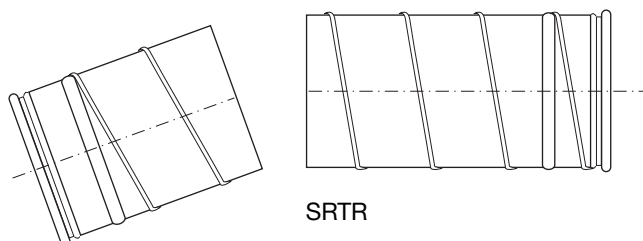

Shorten the duct to the desired length. Also consider the installation length of the slide-on stub.

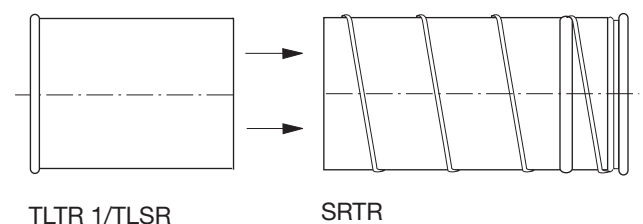

### Install telescopic duct


For Ø80-200 use TLTR-1 (page 484)

### Remember to


Turn the duct so that the joint does not point towards the direction of the air flow.

## Lengthways swaged duct LRTR

### Adaption with fixed length

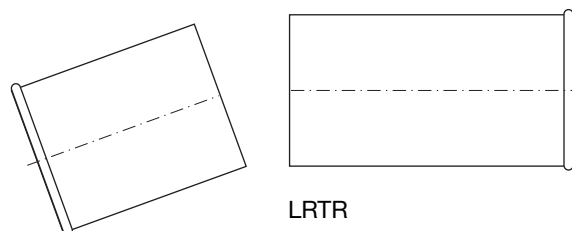


Shorten the duct to the desired length. Also consider the installation length of the slide-on stub.

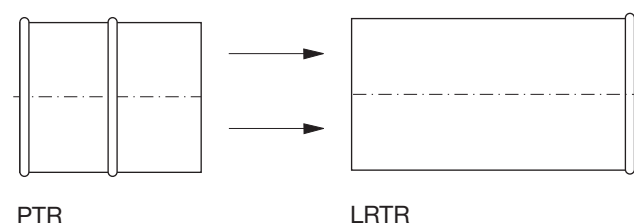


Install slide-on stub PTR (please refer to page 483).

### Adaption with flexible length

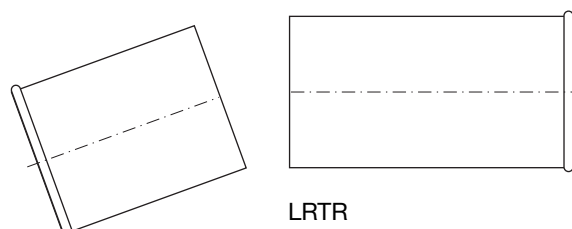

Shorten the duct to the desired length. Also consider the installation length of the slide-on stub.

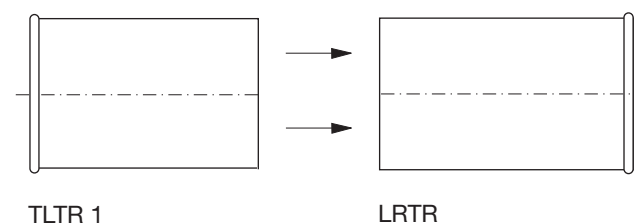

### Install telescopic duct

Use TLTR-1 (page 484)

### Remember to

Turn the duct so that the joint does not point towards the direction of the air flow.

## Bend


## BTR 90°



## Description

Pressed and seam welded bend.

## Dimensions

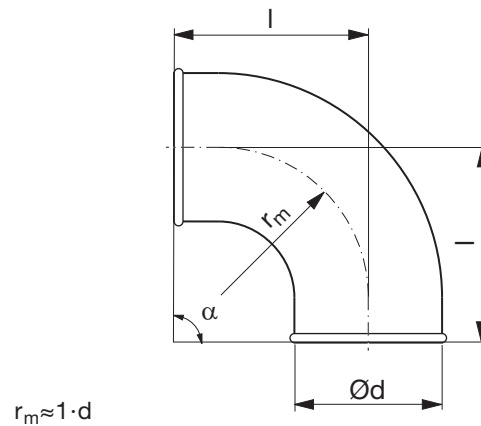

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l<br>mm | m<br>kg |
|-----------|---------|----------------------|---------|---------|
| 80        | 0,5     | 100                  | 135     | 0,31    |
| 100       | 0,5     | 100                  | 130     | 0,30    |
| 125       | 0,5     | 125                  | 155     | 0,50    |
| 140       | 0,7     | 135                  | 165     | 0,70    |
| 150       | 0,7     | 150                  | 180     | 0,80    |
| 160       | 0,6     | 160                  | 190     | 0,65    |
| 180       | 0,7     | 180                  | 205     | 1,00    |
| 200 **    | 0,7     | 200                  | 252     | 1,20    |
| 224 **    | 0,7     | 225                  | 277     | 1,37    |
| 250 **    | 0,7     | 250                  | 302     | 1,71    |

\*\* 2 swaged-on ends

## Ordering example

|              |            |            |           |
|--------------|------------|------------|-----------|
|              | <b>BTR</b> | <b>125</b> | <b>90</b> |
| Product      |            |            |           |
| Dimension Ød |            |            |           |
| Angle α      |            |            |           |

# Bend


# BTR 60°



### Description

Pressed and seam welded bend.

### Dimensions

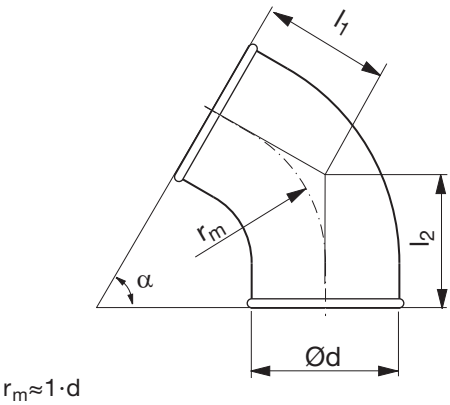

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l <sub>1</sub><br>mm | l <sub>2</sub><br>mm | m<br>kg |
|-----------|---------|----------------------|----------------------|----------------------|---------|
| 80 *      | 0,5     | 100                  | 88                   | 114                  | 0,20    |
| 100       | 0,5     | 100                  | 108                  | 108                  | 0,20    |
| 125       | 0,6     | 125                  | 122                  | 122                  | 0,25    |
| 140 *     | 0,7     | 135                  | 108                  | 134                  | 0,50    |
| 150 *     | 0,7     | 150                  | 117                  | 143                  | 0,51    |
| 160 *     | 0,6     | 160                  | 122                  | 148                  | 0,51    |
| 180 *     | 0,7     | 180                  | 129                  | 156                  | 0,80    |
| 200 **    | 0,7     | 200                  | 167                  | 167                  | 0,86    |
| 224 **    | 0,7     | 225                  | 182                  | 182                  | 1,03    |
| 250 **    | 0,7     | 250                  | 196                  | 196                  | 1,20    |

\* 1 swagged-on end

\*\* 2 swaged-on ends

### Ordering example

|              |            |            |           |
|--------------|------------|------------|-----------|
|              | <b>BTR</b> | <b>125</b> | <b>60</b> |
| Product      |            |            |           |
| Dimension Ød |            |            |           |
| Angle α      |            |            |           |

# Bend


# BTR 45°



## Description

Pressed and seam welded bend.

## Dimensions

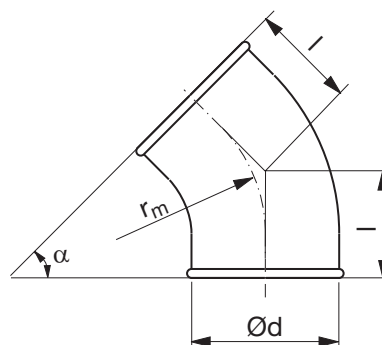

$$r_m \approx 1 \cdot d$$

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l<br>mm | m<br>kg |
|-----------|---------|----------------------|---------|---------|
| 80        | 0,5     | 100                  | 71      | 0,20    |
| 100       | 0,5     | 100                  | 71      | 0,30    |
| 125       | 0,5     | 125                  | 82      | 0,30    |
| 140       | 0,7     | 135                  | 86      | 0,40    |
| 150       | 0,7     | 150                  | 92      | 0,43    |
| 160       | 0,6     | 160                  | 96      | 0,43    |
| 180       | 0,7     | 180                  | 110     | 0,68    |
| 200 **    | 0,6     | 200                  | 135     | 0,80    |
| 224 **    | 0,7     | 225                  | 145     | 0,86    |
| 250 **    | 0,7     | 250                  | 156     | 0,86    |

\*\* 2 swaged-on ends

## Ordering example

|              |            |            |           |
|--------------|------------|------------|-----------|
|              | <b>BTR</b> | <b>125</b> | <b>45</b> |
| Product      |            |            |           |
| Dimension Ød |            |            |           |
| Angle α      |            |            |           |

# Bend


BTR 30°



### Description

Pressed and seam welded bend.

### Dimensions

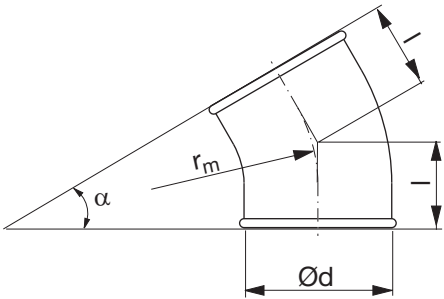

$r_m \approx 1 \cdot d$

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l<br>mm | m<br>kg |
|-----------|---------|----------------------|---------|---------|
| 80        | 0,5     | 100                  | 57      | 0,20    |
| 100       | 0,5     | 100                  | 57      | 0,20    |
| 125       | 0,6     | 125                  | 63      | 0,25    |
| 140       | 0,7     | 140                  | 68      | 0,40    |
| 150       | 0,7     | 150                  | 70      | 0,34    |
| 160       | 0,7     | 160                  | 73      | 0,50    |
| 180       | 0,7     | 180                  | 73      | 0,60    |
| 200 **    | 0,7     | 200                  | 106     | 0,80    |
| 224 **    | 0,7     | 225                  | 112     | 0,77    |
| 250 **    | 0,7     | 250                  | 119     | 1,10    |

\*\* 2 swaged-on ends

### Ordering example

|              |            |            |           |
|--------------|------------|------------|-----------|
|              | <b>BTR</b> | <b>125</b> | <b>30</b> |
| Product      |            |            |           |
| Dimension Ød |            |            |           |
| Angle α      |            |            |           |



# Bend


# BTR 15°



## Description

Pressed and seam welded bend.

## Dimensions

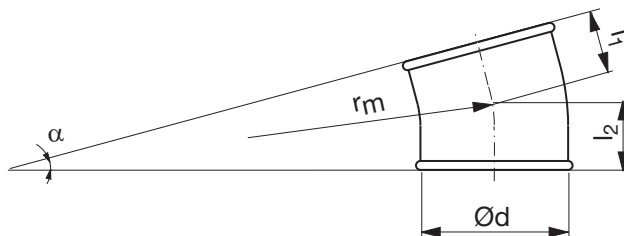

$$r_m \approx 1 \cdot d$$

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l <sub>1</sub><br>mm | l <sub>2</sub><br>mm | m<br>kg |
|-----------|---------|----------------------|----------------------|----------------------|---------|
| 80 *      | 0,5     | 100                  | 43                   | 69                   | 0,10    |
| 100       | 0,5     | 100                  | 43                   | 43                   | 0,20    |
| 125       | 0,5     | 125                  | 46                   | 46                   | 0,14    |
| 140 **    | 0,7     | 140                  | 74                   | 74                   | 0,30    |
| 150 **    | 0,6     | 150                  | 76                   | 76                   | 0,26    |
| 160       | 0,5     | 160                  | 51                   | 51                   | 0,14    |
| 180 **    | 0,7     | 180                  | 76                   | 76                   | 0,40    |
| 200 **    | 0,7     | 200                  | 78                   | 78                   | 0,43    |
| 224 **    | 0,7     | 225                  | 81                   | 81                   | 0,60    |

\* 1 swaged-on end

\*\* 2 swaged-on ends

## Ordering example

|              |     |     |    |
|--------------|-----|-----|----|
| Product      | BTR | 125 | 15 |
| Dimension Ød |     |     |    |
| Angle α      |     |     |    |

# Bend


# BSTR 90°



### Description

Pressed and seam welded bend.

### Dimensions

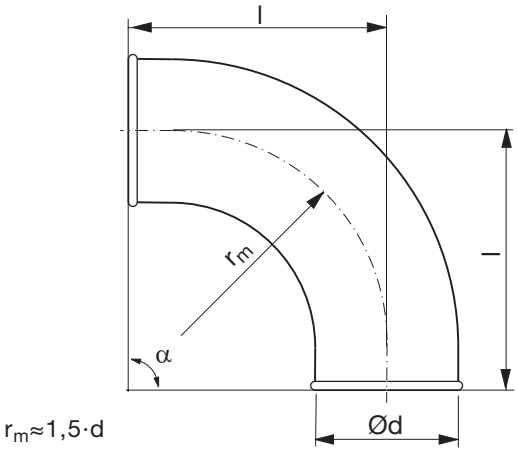

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l<br>mm | m<br>kg |
|-----------|---------|----------------------|---------|---------|
| 100       | 0,6     | 150                  | 180     | 0,50    |
| 125       | 0,7     | 190                  | 220     | 0,80    |
| 150       | 0,7     | 225                  | 255     | 1,10    |
| 160       | 0,7     | 240                  | 270     | 1,20    |
| 180       | 0,7     | 270                  | 295     | 1,60    |
| 200 **    | 0,6     | 300                  | 352     | 1,63    |

\*\* 2 swaged-on ends

### Ordering example

|              |      |     |    |
|--------------|------|-----|----|
|              | BSTR | 160 | 90 |
| Product      |      |     |    |
| Dimension Ød |      |     |    |
| Angle α      |      |     |    |

# Bend


# BSTR 60°



## Description

Pressed and seam welded bend.

## Dimensions

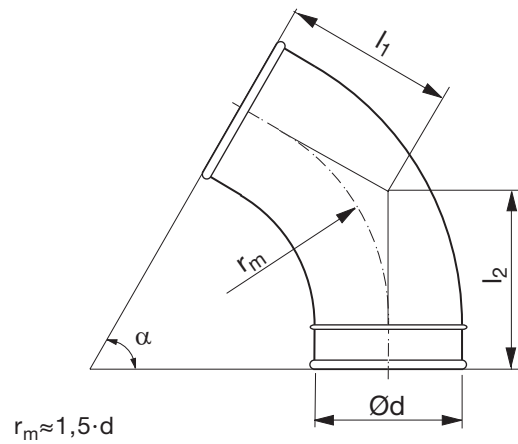

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l <sub>1</sub><br>mm | l <sub>2</sub><br>mm | m<br>kg |
|-----------|---------|----------------------|----------------------|----------------------|---------|
| 100 *     | 0,6     | 150                  | 117                  | 143                  | 0,40    |
| 125 *     | 0,7     | 190                  | 140                  | 166                  | 0,60    |
| 150 *     | 0,7     | 225                  | 160                  | 186                  | 0,70    |
| 160 *     | 0,7     | 240                  | 169                  | 195                  | 0,80    |
| 180 *     | 0,7     | 270                  | 181                  | 208                  | 1,20    |
| 200 **    | 0,7     | 300                  | 225                  | 225                  | 1,13    |

\* 1 swaged-on end

\*\* 2 swaged-on ends

## Ordering example

|              |      |     |    |
|--------------|------|-----|----|
| Product      | BSTR | 200 | 60 |
| Dimension Ød |      |     |    |
| Angle α      |      |     |    |

# Bend


# BSTR 45°



## Description

Pressed and seam welded bend.

## Dimensions

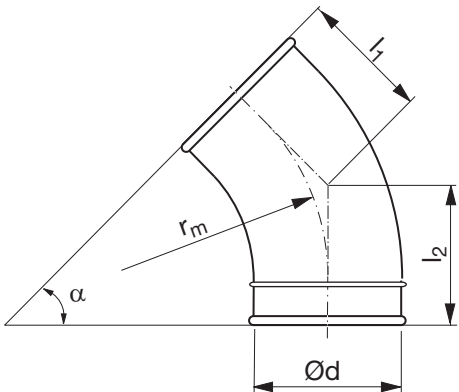

$r_m \approx 1,5 \cdot d$

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l <sub>1</sub><br>mm | l <sub>2</sub><br>mm | m<br>kg |
|-----------|---------|----------------------|----------------------|----------------------|---------|
| 100 *     | 0,6     | 150                  | 92                   | 118                  | 0,30    |
| 125 *     | 0,7     | 190                  | 109                  | 135                  | 0,40    |
| 150 *     | 0,7     | 225                  | 123                  | 149                  | 0,50    |
| 160 *     | 0,7     | 240                  | 129                  | 155                  | 0,60    |
| 180 *     | 0,7     | 270                  | 137                  | 164                  | 0,90    |
| 200 **    | 0,6     | 300                  | 176                  | 176                  | 0,88    |

\* 1 swaged-on end

\*\* 2 swaged-on ends

## Ordering example

|              |      |     |    |
|--------------|------|-----|----|
|              | BSTR | 200 | 45 |
| Product      |      |     |    |
| Dimension Ød |      |     |    |
| Angle α      |      |     |    |

# Bend


# BSTR 30°



## Description

Pressed and seam welded bend.

## Dimensions

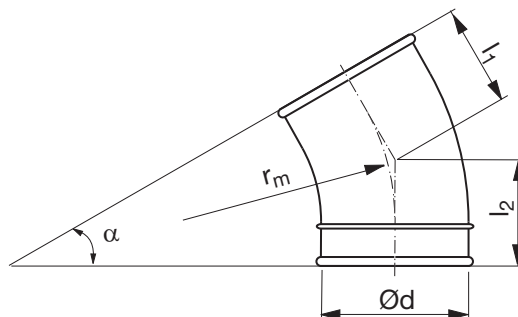

$$r_m \approx 1,5 \cdot d$$

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l <sub>1</sub><br>mm | l <sub>2</sub><br>mm | m<br>kg |
|-----------|---------|----------------------|----------------------|----------------------|---------|
| 100 *     | 0,6     | 150                  | 70                   | 96                   | 0,30    |
| 125 *     | 0,7     | 190                  | 81                   | 107                  | 0,30    |
| 150 *     | 0,7     | 225                  | 90                   | 116                  | 0,50    |
| 160 *     | 0,7     | 240                  | 94                   | 120                  | 0,50    |
| 180 *     | 0,7     | 270                  | 97                   | 124                  | 0,70    |
| 200 **    | 0,7     | 300                  | 132                  | 132                  | 0,79    |

\* 1 swaged-on end

\*\* 2 swaged-on ends

## Ordering example

|              |      |     |    |
|--------------|------|-----|----|
| Product      | BSTR | 160 | 30 |
| Dimension Ød |      |     |    |
| Angle α      |      |     |    |

# Bend


BSTR 15°



## Description

Pressed and seam welded bend.

## Dimensions

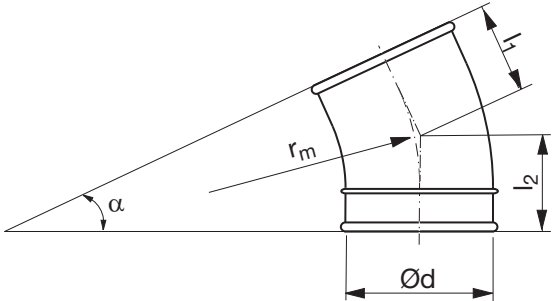

$r_m \approx 1,5 \cdot d$

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l <sub>1</sub><br>mm | l <sub>2</sub><br>mm | m<br>kg |
|-----------|---------|----------------------|----------------------|----------------------|---------|
| 100 *     | 0,6     | 150                  | 50                   | 76                   | 0,20    |
| 125 *     | 0,7     | 190                  | 55                   | 81                   | 0,40    |
| 150 *     | 0,7     | 225                  | 60                   | 86                   | 0,40    |
| 160 *     | 0,7     | 240                  | 62                   | 88                   | 0,40    |
| 180 *     | 0,7     | 270                  | 61                   | 88                   | 0,50    |
| 200 **    | 0,7     | 300                  | 91                   | 91                   | 0,62    |

\* 1 swaged-on end

\*\* 2 swaged-on ends

## Ordering example

|              |      |     |    |
|--------------|------|-----|----|
|              | BSTR | 160 | 15 |
| Product      |      |     |    |
| Dimension Ød |      |     |    |
| Angle α      |      |     |    |

# Bend


# BSFTR 90°



## Description

Segmented and swaged bend.

## Dimensions

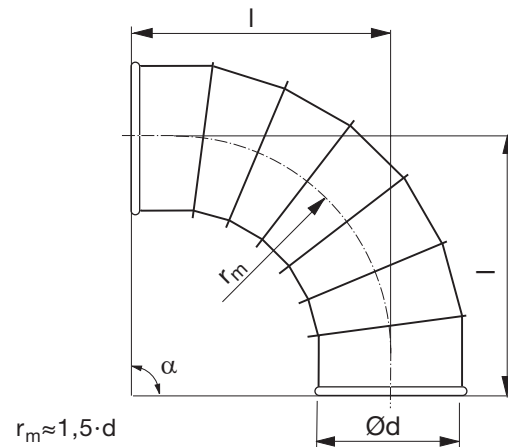

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l<br>mm | m<br>kg |
|-----------|---------|----------------------|---------|---------|
| 200       | 0,7     | 300                  | 387     | 3,40    |
| 224       | 0,7     | 336                  | 423     | 4,20    |
| 250       | 0,7     | 375                  | 462     | 4,90    |
| 300       | 0,7     | 450                  | 531     | 6,40    |
| 315       | 0,7     | 472                  | 553     | 7,10    |
| 350       | 0,7     | 525                  | 606     | 9,00    |
| 400       | 0,9     | 600                  | 681     | 13,1    |
| 450       | 0,9     | 675                  | 756     | 16,2    |
| 500       | 0,9     | 750                  | 831     | 19,5    |
| 560 *     | 0,9     | 840                  | 875     | 29,3    |
| 600 *     | 0,9     | 900                  | 935     | 32,7    |
| 630 *     | 0,9     | 945                  | 980     | 37,3    |
| 650 *     | 0,9     | 975                  | 1010    | 41,4    |
| 710 *     | 0,9     | 1065                 | 1100    | 47,0    |
| 750 *     | 0,9     | 1125                 | 1160    | 51,1    |
| 800 *     | 0,9     | 1200                 | 1235    | 54,5    |
| 900 *     | 0,9     | 1350                 | 1385    | 74,8    |

\* Supplied with flange FL

## Ordering example

|              |       |     |    |
|--------------|-------|-----|----|
|              | BSFTR | 250 | 90 |
| Product      |       |     |    |
| Dimension Ød |       |     |    |
| Angle α      |       |     |    |

# Bend


# BSFTR 60°



## Description

Segmented and swaged bend.

## Dimensions

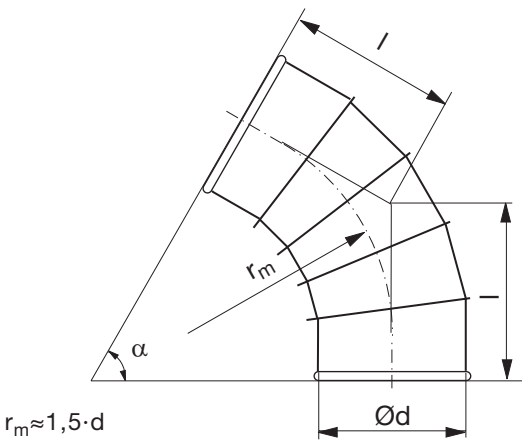

| Ød<br>nom | t<br>mm | rm<br>mm | l<br>mm | m<br>kg |
|-----------|---------|----------|---------|---------|
| 200       | 0,7     | 300      | 260     | 2,30    |
| 224       | 0,7     | 336      | 281     | 2,70    |
| 250       | 0,7     | 375      | 304     | 3,10    |
| 300       | 0,7     | 450      | 341     | 4,20    |
| 315       | 0,7     | 472      | 354     | 4,60    |
| 350       | 0,7     | 525      | 384     | 5,60    |
| 400       | 0,9     | 600      | 427     | 8,10    |
| 450       | 0,9     | 675      | 471     | 10,1    |
| 500       | 0,9     | 750      | 514     | 12,1    |
| 560 *     | 0,9     | 840      | 520     | 20,8    |
| 600 *     | 0,9     | 900      | 555     | 23,5    |
| 630 *     | 0,9     | 945      | 581     | 24,6    |
| 650 *     | 0,9     | 975      | 598     | 27,2    |
| 710 *     | 0,9     | 1065     | 650     | 36,4    |
| 750 *     | 0,9     | 1125     | 685     | 40,4    |
| 800 *     | 0,9     | 1200     | 728     | 42,3    |
| 900 *     | 0,9     | 1350     | 814     | 45,1    |

\* Supplied with flange FL

## Ordering example

|              |       |     |    |
|--------------|-------|-----|----|
|              | BSFTR | 250 | 60 |
| Product      |       |     |    |
| Dimension Ød |       |     |    |
| Angle α      |       |     |    |



# Bend


# BSFTR 45°



## Description

Segmented and swaged bend.

## Dimensions

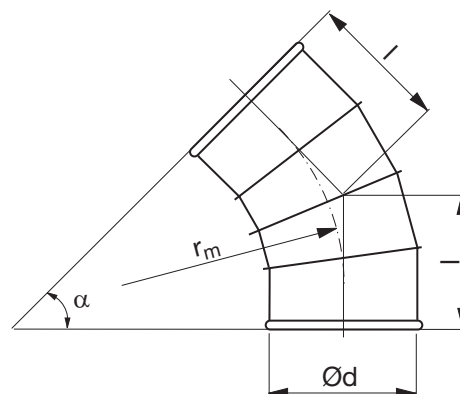

$$r_m \approx 1,5 \cdot d$$

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l<br>mm | m<br>kg |
|-----------|---------|----------------------|---------|---------|
| 200       | 0,7     | 300                  | 211     | 1,90    |
| 224       | 0,7     | 336                  | 226     | 2,20    |
| 250       | 0,7     | 375                  | 242     | 2,50    |
| 300       | 0,7     | 450                  | 267     | 3,40    |
| 315       | 0,7     | 472                  | 277     | 3,70    |
| 350       | 0,7     | 525                  | 298     | 4,50    |
| 400       | 0,9     | 600                  | 330     | 6,50    |
| 450       | 0,9     | 675                  | 361     | 7,90    |
| 500       | 0,9     | 750                  | 392     | 9,40    |
| 560 *     | 0,9     | 840                  | 383     | 16,7    |
| 600 *     | 0,9     | 900                  | 408     | 18,5    |
| 630 *     | 0,9     | 945                  | 426     | 20,1    |
| 650 *     | 0,9     | 975                  | 439     | 22,3    |
| 710 *     | 0,9     | 1065                 | 476     | 26,4    |
| 750 *     | 0,9     | 1125                 | 501     | 28,6    |
| 800 *     | 0,9     | 1200                 | 532     | 31,8    |
| 900 *     | 0,9     | 1350                 | 594     | 34,9    |

\* Supplied with flange FL

## Ordering example

|              |       |     |    |
|--------------|-------|-----|----|
|              | BSFTR | 250 | 45 |
| Product      |       |     |    |
| Dimension Ød |       |     |    |
| Angle α      |       |     |    |

# Bend


# BSFTR 30°



### Description

Segmented and swaged bend.

### Dimensions

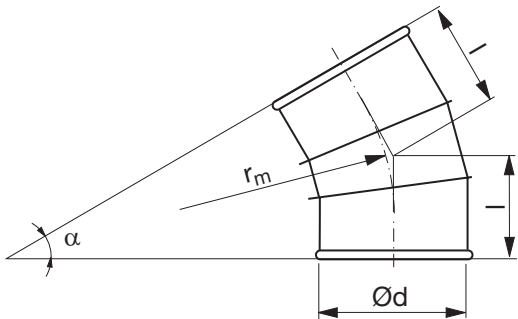

$r_m \approx 1,5 \cdot d$

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l<br>mm | m<br>kg |
|-----------|---------|----------------------|---------|---------|
| 200       | 0,7     | 300                  | 167     | 1,50    |
| 224       | 0,7     | 336                  | 177     | 1,70    |
| 250       | 0,7     | 375                  | 187     | 1,90    |
| 300       | 0,7     | 450                  | 202     | 2,50    |
| 315       | 0,7     | 472                  | 208     | 2,80    |
| 350       | 0,7     | 525                  | 222     | 3,40    |
| 400       | 0,9     | 600                  | 242     | 4,90    |
| 450       | 0,9     | 675                  | 262     | 5,80    |
| 500       | 0,9     | 750                  | 282     | 6,80    |
| 560 *     | 0,9     | 840                  | 260     | 12,7    |
| 600 *     | 0,9     | 900                  | 276     | 14,5    |
| 630 *     | 0,9     | 945                  | 288     | 15,7    |
| 650 *     | 0,9     | 975                  | 296     | 18,4    |
| 710 *     | 0,9     | 1065                 | 320     | 20,2    |
| 750 *     | 0,9     | 1125                 | 336     | 21,5    |
| 800 *     | 0,9     | 1200                 | 357     | 24,9    |
| 900 *     | 0,9     | 1350                 | 397     | 29,6    |

\* Supplied with flange FL

### Ordering example

|              |       |     |    |
|--------------|-------|-----|----|
|              | BSFTR | 250 | 30 |
| Product      |       |     |    |
| Dimension Ød |       |     |    |
| Angle α      |       |     |    |

# Bend


# BSFTR 15°



## Description

Segmented and swaged bend.

## Dimensions

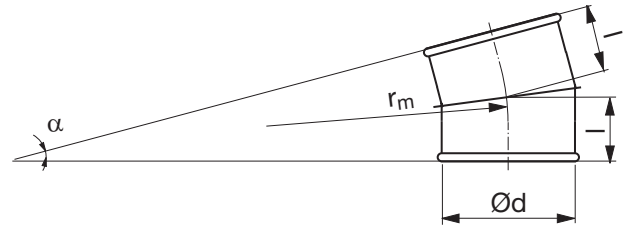

$$r_m \approx 1,5 \cdot d$$

| Ød<br>nom | t<br>mm | r <sub>m</sub><br>mm | l<br>mm | m<br>kg |
|-----------|---------|----------------------|---------|---------|
| 200       | 0,7     | 300                  | 126     | 1,10    |
| 224       | 0,7     | 336                  | 131     | 1,30    |
| 250       | 0,7     | 375                  | 136     | 1,50    |
| 300       | 0,7     | 450                  | 140     | 2,00    |
| 315       | 0,7     | 472                  | 143     | 2,40    |
| 350       | 0,7     | 525                  | 150     | 2,90    |
| 400       | 0,9     | 600                  | 160     | 4,50    |
| 450       | 0,9     | 675                  | 170     | 5,40    |
| 500       | 0,9     | 750                  | 180     | 6,20    |
| 560 *     | 0,9     | 840                  | 146     | 11,8    |
| 600 *     | 0,9     | 900                  | 153     | 13,4    |
| 630 *     | 0,9     | 945                  | 159     | 15,6    |
| 650 *     | 0,9     | 975                  | 163     | 16,4    |
| 710 *     | 0,9     | 1065                 | 175     | 18,3    |
| 750 *     | 0,9     | 1125                 | 183     | 19,6    |
| 800 *     | 0,9     | 1200                 | 193     | 22,4    |
| 900 *     | 0,9     | 1350                 | 213     | 26,3    |

\* Supplied with flange FL

## Ordering example

|              |       |     |    |
|--------------|-------|-----|----|
|              | BSFTR | 250 | 15 |
| Product      |       |     |    |
| Dimension Ød |       |     |    |
| Angle α      |       |     |    |


# Reducer

RCLTR



### Description

Long, concentric reducer with about 18° angle.

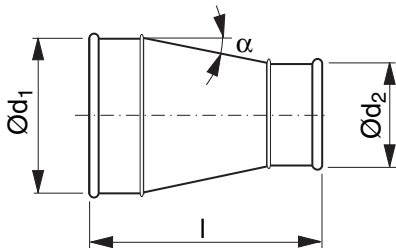

### Ordering example

|                           |       |     |     |
|---------------------------|-------|-----|-----|
|                           | RCLTR | 250 | 160 |
| Product                   |       |     |     |
| Dimension Ød <sub>1</sub> |       |     |     |
| Dimension Ød <sub>2</sub> |       |     |     |

### Dimensions

| Ød <sub>1</sub><br>nom | Ød <sub>2</sub><br>nom | t<br>mm | l<br>mm | m<br>kg |
|------------------------|------------------------|---------|---------|---------|
| 100                    | 80                     | 0,7     | 162     | 0,30    |
| 125                    | 80                     | 0,7     | 196     | 0,40    |
| 125                    | 100                    | 0,7     | 168     | 0,40    |
| 140                    | 80                     | 0,7     | 216     | 0,60    |
| 140                    | 100                    | 0,7     | 189     | 0,40    |
| 140                    | 125                    | 0,7     | 155     | 0,40    |
| 150                    | 80                     | 0,7     | 230     | 0,60    |
| 150                    | 100                    | 0,7     | 203     | 0,60    |
| 150                    | 125                    | 0,7     | 168     | 0,40    |
| 150                    | 140                    | 0,7     | 148     | 0,40    |
| 160                    | 80                     | 0,7     | 244     | 0,70    |
| 160                    | 100                    | 0,7     | 216     | 0,60    |
| 160                    | 125                    | 0,7     | 182     | 0,50    |
| 160                    | 140                    | 0,7     | 161     | 0,60    |
| 160                    | 150                    | 0,7     | 148     | 0,40    |
| 180                    | 100                    | 0,7     | 239     | 0,60    |
| 180                    | 125                    | 0,7     | 205     | 0,60    |
| 180                    | 140                    | 0,7     | 184     | 0,60    |
| 180                    | 150                    | 0,7     | 170     | 0,60    |
| 180                    | 160                    | 0,7     | 157     | 0,50    |
| 200                    | 125                    | 0,7     | 232     | 0,80    |
| 200                    | 140                    | 0,7     | 211     | 0,70    |
| 200                    | 150                    | 0,7     | 198     | 0,70    |
| 200                    | 160                    | 0,7     | 184     | 0,60    |
| 200                    | 180                    | 0,7     | 152     | 0,50    |
| 224                    | 140                    | 0,7     | 244     | 1,00    |
| 224                    | 150                    | 0,7     | 231     | 1,00    |
| 224                    | 160                    | 0,7     | 217     | 0,80    |
| 224                    | 180                    | 0,7     | 184     | 0,80    |
| 224                    | 200                    | 0,7     | 157     | 0,70    |
| 250                    | 140                    | 0,7     | 280     | 1,30    |
| 250                    | 150                    | 0,7     | 266     | 1,30    |
| 250                    | 160                    | 0,7     | 253     | 1,10    |
| 250                    | 180                    | 0,7     | 220     | 1,00    |
| 250                    | 200                    | 0,7     | 193     | 1,00    |
| 250                    | 224                    | 0,7     | 160     | 1,00    |
| 300                    | 150                    | 0,7     | 332     | 1,70    |
| 300                    | 160                    | 0,7     | 318     | 1,70    |
| 300                    | 180                    | 0,7     | 286     | 1,70    |
| 300                    | 200                    | 0,7     | 258     | 1,50    |
| 300                    | 250                    | 0,7     | 190     | 1,40    |
| 315                    | 160                    | 0,7     | 339     | 1,60    |
| 315                    | 180                    | 0,7     | 307     | 1,60    |
| 315                    | 200                    | 0,7     | 279     | 1,50    |
| 315                    | 224                    | 0,7     | 246     | 1,40    |

## Reducer

## RCLTR

| Ød <sub>1</sub><br>nom | Ød <sub>2</sub><br>nom | t<br>mm | l<br>mm | m<br>kg |
|------------------------|------------------------|---------|---------|---------|
| 315                    | 250                    | 0,7     | 210     | 1,40    |
| 315                    | 300                    | 0,7     | 139     | 1,30    |
| 350                    | 180                    | 0,7     | 361     | 2,00    |
| 350                    | 200                    | 0,7     | 334     | 2,00    |
| 350                    | 224                    | 0,7     | 301     | 2,10    |
| 350                    | 250                    | 0,7     | 265     | 1,90    |
| 350                    | 300                    | 0,7     | 194     | 1,70    |
| 350                    | 315                    | 0,7     | 173     | 1,40    |
| 400                    | 180                    | 0,7     | 428     | 2,80    |
| 400                    | 200                    | 0,7     | 401     | 2,80    |
| 400                    | 224                    | 0,7     | 368     | 3,00    |
| 400                    | 250                    | 0,7     | 332     | 2,60    |
| 400                    | 300                    | 0,7     | 260     | 2,70    |
| 400                    | 315                    | 0,7     | 240     | 2,30    |
| 400                    | 350                    | 0,7     | 185     | 2,00    |
| 450                    | 200                    | 0,7     | 469     | 3,50    |
| 450                    | 224                    | 0,7     | 437     | 3,80    |
| 450                    | 250                    | 0,7     | 401     | 3,30    |
| 450                    | 300                    | 0,7     | 329     | 3,40    |
| 450                    | 315                    | 0,7     | 309     | 2,90    |
| 450                    | 350                    | 0,7     | 254     | 2,60    |
| 450                    | 400                    | 0,9     | 197     | 2,80    |
| 500                    | 224                    | 0,7     | 505     | 4,30    |
| 500                    | 250                    | 0,7     | 469     | 4,00    |
| 500                    | 300                    | 0,7     | 398     | 4,00    |
| 500                    | 315                    | 0,7     | 377     | 3,80    |
| 500                    | 350                    | 0,7     | 322     | 3,40    |
| 500                    | 400                    | 0,9     | 265     | 3,60    |
| 500                    | 450                    | 0,9     | 197     | 3,20    |
| 560 *                  | 250                    | 0,7     | 578     | 8,20    |
| 560 *                  | 300                    | 0,9     | 506     | 8,00    |
| 560 *                  | 315                    | 0,7     | 485     | 7,80    |
| 560 *                  | 350                    | 0,7     | 431     | 7,60    |
| 560 *                  | 400                    | 0,9     | 374     | 7,40    |
| 560 *                  | 450                    | 0,9     | 305     | 7,00    |
| 560 *                  | 500                    | 0,9     | 236     | 6,50    |
| 600 *                  | 300                    | 0,9     | 561     | 8,60    |
| 600 *                  | 315                    | 0,7     | 541     | 8,60    |
| 600 *                  | 350                    | 0,7     | 486     | 8,20    |
| 600 *                  | 400                    | 0,9     | 429     | 8,20    |
| 600 *                  | 450                    | 0,9     | 360     | 7,70    |
| 600 *                  | 500                    | 0,9     | 291     | 7,20    |
| 600 *                  | 560                    | 0,9     | 235     | 6,40    |
| 630 *                  | 315                    | 0,7     | 582     | 8,60    |
| 630 *                  | 350                    | 0,7     | 527     | 8,00    |
| 630 *                  | 400                    | 0,9     | 470     | 7,90    |
| 630 *                  | 450                    | 0,9     | 401     | 7,40    |
| 630 *                  | 500                    | 0,9     | 333     | 7,00    |

| Ød <sub>1</sub><br>nom | Ød <sub>2</sub><br>nom | t<br>mm | l<br>mm | m<br>kg |
|------------------------|------------------------|---------|---------|---------|
| 630 *                  | 560 *                  | 0,9     | 276     | 9,30    |
| 630 *                  | 600                    | 0,9     | 221     | 8,80    |
| 650 *                  | 350                    | 0,9     | 547     | 8,40    |
| 650 *                  | 400                    | 0,9     | 490     | 8,30    |
| 650 *                  | 450                    | 0,9     | 421     | 7,80    |
| 650 *                  | 500                    | 0,9     | 353     | 7,40    |
| 650 *                  | 560 *                  | 0,9     | 296     | 9,70    |
| 650 *                  | 600 *                  | 0,9     | 241     | 9,20    |
| 650 *                  | 630 *                  | 0,9     | 221     | 9,00    |
| 710 *                  | 400                    | 0,9     | 605     | 9,60    |
| 710 *                  | 450                    | 0,9     | 536     | 9,20    |
| 710 *                  | 500                    | 0,9     | 467     | 8,70    |
| 710 *                  | 560 *                  | 0,9     | 411     | 11,1    |
| 710 *                  | 600 *                  | 0,9     | 356     | 10,6    |
| 710 *                  | 630 *                  | 0,9     | 315     | 10,2    |
| 750 *                  | 450                    | 0,9     | 566     | 9,60    |
| 750 *                  | 500                    | 0,9     | 497     | 9,10    |
| 750 *                  | 560 *                  | 0,9     | 441     | 11,5    |
| 750 *                  | 600 *                  | 0,9     | 386     | 11,0    |
| 750 *                  | 630 *                  | 0,9     | 345     | 10,6    |
| 750 *                  | 650 *                  | 0,9     | 325     | 10,4    |
| 750 *                  | 710 *                  | 0,9     | 290     | 10,0    |
| 800 *                  | 500                    | 0,9     | 591     | 11,0    |
| 800 *                  | 560 *                  | 0,9     | 535     | 13,4    |
| 800 *                  | 600 *                  | 0,9     | 480     | 12,9    |
| 800 *                  | 630 *                  | 0,9     | 439     | 12,5    |
| 800 *                  | 650 *                  | 0,9     | 419     | 12,1    |
| 800 *                  | 710 *                  | 0,9     | 354     | 11,6    |
| 800 *                  | 750 *                  | 0,9     | 325     | 11,2    |
| 900 *                  | 560 *                  | 0,9     | 697     | 17,7    |
| 900 *                  | 600 *                  | 0,9     | 642     | 17,0    |
| 900 *                  | 630 *                  | 0,9     | 601     | 16,5    |
| 900 *                  | 650 *                  | 0,9     | 570     | 16,1    |
| 900 *                  | 710 *                  | 0,9     | 516     | 15,3    |
| 900 *                  | 750 *                  | 0,9     | 450     | 14,9    |
| 900 *                  | 800 *                  | 0,9     | 392     | 13,8    |

\* Supplied with flange FL

# T-piece

TVTR30



## Description


T-piece.

### NB

To save space, the adjacent table only contains a limited selection from our range the T-pieces where all dimensions  $d_1$ ,  $d_2$  and  $d_3$  are equal in size. Other dimensions are available to special order.

In all combinations, the installation length  $l_1$  is only governed by the branch diameter  $d_3$ . For example, all T-pieces with  $d_3 = 200$  have installation length  $l_1 = 589$  mm.

## Dimensions

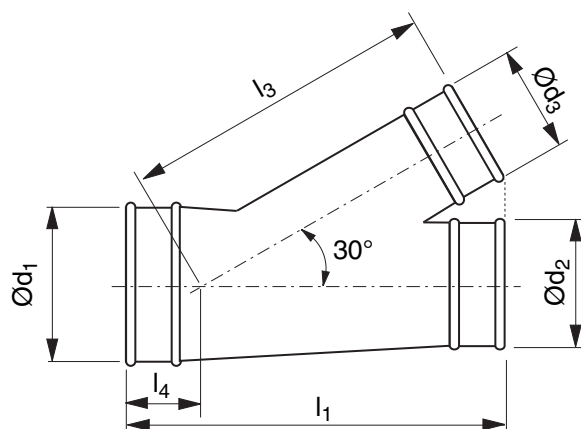

| Ød <sub>1</sub><br>nom | Ød <sub>2</sub><br>nom | Ød <sub>3</sub><br>nom | t<br>mm | l <sub>1</sub><br>mm | l <sub>3</sub><br>mm | l <sub>4</sub><br>mm | m<br>kg |
|------------------------|------------------------|------------------------|---------|----------------------|----------------------|----------------------|---------|
| 80                     | 80                     | 80                     | 0,7     | 358                  | 263                  | 109                  | 0,90    |
| 100                    | 100                    | 100                    | 0,7     | 398                  | 301                  | 112                  | 1,20    |
| 125                    | 125                    | 125                    | 0,7     | 448                  | 347                  | 116                  | 1,60    |
| 140                    | 140                    | 140                    | 0,7     | 478                  | 375                  | 118                  | 1,80    |
| 150                    | 150                    | 150                    | 0,7     | 498                  | 394                  | 119                  | 2,00    |
| 160                    | 160                    | 160                    | 0,7     | 518                  | 413                  | 120                  | 2,30    |
| 180                    | 180                    | 180                    | 0,7     | 549                  | 445                  | 119                  | 2,80    |
| 200                    | 200                    | 200                    | 0,7     | 589                  | 482                  | 121                  | 3,40    |
| 224                    | 224                    | 224                    | 0,7     | 637                  | 527                  | 124                  | 4,20    |
| 250                    | 250                    | 250                    | 0,7     | 689                  | 576                  | 128                  | 4,90    |
| 300                    | 300                    | 300                    | 0,7     | 777                  | 662                  | 129                  | 7,00    |
| 315                    | 315                    | 315                    | 0,7     | 807                  | 690                  | 131                  | 7,30    |
| 350                    | 350                    | 350                    | 0,7     | 960                  | 755                  | 177                  | 9,00    |
| 400                    | 400                    | 400                    | 0,9     | 1060                 | 848                  | 184                  | 14,0    |
| 450                    | 450                    | 450                    | 0,9     | 1160                 | 842                  | 190                  | 16,9    |
| 500                    | 500                    | 500                    | 0,9     | 1260                 | 1035                 | 197                  | 20,1    |
| 560 *                  | 560 *                  | 560 *                  | 0,9     | 1520                 | 1245                 | 275                  | 26,0    |
| 600 *                  | 600 *                  | 600 *                  | 0,9     | 1600                 | 1320                 | 280                  | 29,0    |
| 630 *                  | 630 *                  | 630 *                  | 0,9     | 1660                 | 1376                 | 284                  | 31,0    |
| 650 *                  | 650 *                  | 650 *                  | 0,9     | 1700                 | 1413                 | 287                  | 34,0    |
| 710 *                  | 710 *                  | 710 *                  | 0,9     | 1820                 | 1525                 | 295                  | 41,0    |
| 750 *                  | 750 *                  | 750 *                  | 0,9     | 1900                 | 1600                 | 301                  | 45,0    |
| 800 *                  | 800 *                  | 800 *                  | 0,9     | 2000                 | 1693                 | 307                  | 51,0    |
| 900 *                  | 900 *                  | 900 *                  | 0,9     | 2200                 | 1879                 | 321                  | 64,0    |

\* Supplied with flange FL

## Ordering example

|                           |        |     |     |     |
|---------------------------|--------|-----|-----|-----|
|                           | TVTR30 | 315 | 200 | 200 |
| Product                   |        |     |     |     |
| Dimension Ød <sub>1</sub> |        |     |     |     |
| Dimension Ød <sub>2</sub> |        |     |     |     |
| Dimension Ød <sub>3</sub> |        |     |     |     |

# X-piece

XVTR30



## Description


X-piece.

### NB

To save space, the adjacent table only contains a limited selection from our range the X-pieces where all dimensions  $d_1$ ,  $d_2$  and  $d_3/d_4$  are equal in size. Other dimensions are available to special order.

In all combinations, the installation length  $l_1$  is only governed by the larger branch diameter  $d_3/d_4$ . For example, all X-pieces with  $d_3 = 160$  and  $d_4 = 200$  have installation length  $l_1 = 589$  mm.

## Dimensions

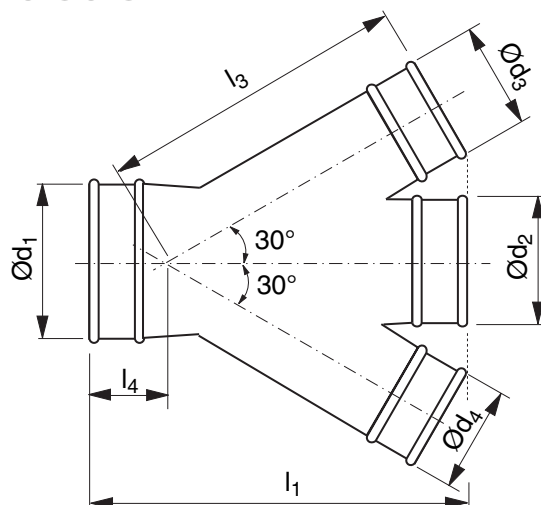

| $\text{Ø}d_1$<br>nom | $\text{Ø}d_2$<br>nom | $\text{Ø}d_3$<br>$\text{Ø}d_4$<br>nom | t<br>mm | $l_1$<br>mm | $l_3$<br>mm | $l_4$<br>mm | m<br>kg |
|----------------------|----------------------|---------------------------------------|---------|-------------|-------------|-------------|---------|
| 80                   | 80                   | 80                                    | 0,7     | 358         | 263         | 109         | 1,10    |
| 100                  | 100                  | 100                                   | 0,7     | 398         | 301         | 112         | 1,40    |
| 125                  | 125                  | 125                                   | 0,7     | 448         | 347         | 116         | 1,80    |
| 140                  | 140                  | 140                                   | 0,7     | 478         | 375         | 118         | 2,10    |
| 150                  | 150                  | 150                                   | 0,7     | 498         | 394         | 119         | 2,30    |
| 160                  | 160                  | 160                                   | 0,7     | 518         | 413         | 120         | 2,60    |
| 180                  | 180                  | 180                                   | 0,7     | 549         | 445         | 119         | 3,20    |
| 200                  | 200                  | 200                                   | 0,7     | 589         | 482         | 121         | 4,00    |
| 224                  | 224                  | 224                                   | 0,7     | 637         | 527         | 124         | 4,90    |
| 250                  | 250                  | 250                                   | 0,7     | 689         | 576         | 128         | 5,80    |
| 300                  | 300                  | 300                                   | 0,7     | 777         | 662         | 129         | 8,80    |
| 315                  | 315                  | 315                                   | 0,7     | 807         | 690         | 131         | 9,30    |
| 350                  | 350                  | 350                                   | 0,7     | 960         | 755         | 177         | 11,2    |
| 400                  | 400                  | 400                                   | 0,9     | 1060        | 848         | 184         | 18,8    |
| 450                  | 450                  | 450                                   | 0,9     | 1160        | 842         | 190         | 22,2    |
| 500                  | 500                  | 500                                   | 0,9     | 1260        | 1035        | 197         | 26,8    |
| 560 *                | 560 *                | 560 *                                 | 0,9     | 1520        | 1245        | 275         | 34,0    |
| 600 *                | 600 *                | 600 *                                 | 0,9     | 1600        | 1320        | 280         | 39,0    |
| 630 *                | 630 *                | 630 *                                 | 0,9     | 1660        | 1376        | 284         | 41,0    |
| 650 *                | 650 *                | 650 *                                 | 0,9     | 1700        | 1413        | 295         | 46,0    |
| 710 *                | 710 *                | 710 *                                 | 0,9     | 1820        | 1525        | 295         | 54,0    |
| 750 *                | 750 *                | 750 *                                 | 0,9     | 1900        | 1600        | 301         | 60,0    |
| 800 *                | 800 *                | 800 *                                 | 0,9     | 2000        | 1693        | 307         | 68,0    |
| 900 *                | 900 *                | 900 *                                 | 0,9     | 2200        | 1879        | 321         | 85,0    |

\* Supplied with flange FL

## Ordering example

|                         | XVTR30 | 400 | 200 | 160 | 160 |
|-------------------------|--------|-----|-----|-----|-----|
| Product                 |        |     |     |     |     |
| Dimension $\text{Ø}d_1$ |        |     |     |     |     |
| Dimension $\text{Ø}d_2$ |        |     |     |     |     |
| Dimension $\text{Ø}d_3$ |        |     |     |     |     |
| Dimension $\text{Ø}d_4$ |        |     |     |     |     |

# Y-piece

YVTR30




## Description

Y-piece.

### NB

To save space, the adjacent table only contains a limited selection from our range the Y-pieces where all dimensions  $d_1$ ,  $d_3$  and  $d_4$  are equal in size. Other dimensions are available to special order.

## Dimensions

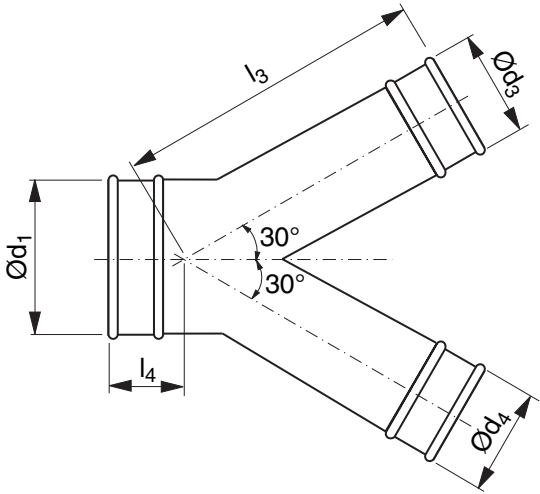

| $\text{Ød}_1$<br>nom | $\text{Ød}_3$<br>$\text{Ød}_4$<br>nom | t<br>mm | $l_3$<br>mm | $l_4$<br>mm | m<br>kg |
|----------------------|---------------------------------------|---------|-------------|-------------|---------|
| 80                   | 80                                    | 0,7     | 191         | 65          | 0,70    |
| 100                  | 100                                   | 0,7     | 213         | 67          | 0,80    |
| 125                  | 125                                   | 0,7     | 242         | 71          | 0,90    |
| 140                  | 140                                   | 0,7     | 259         | 73          | 1,10    |
| 150                  | 150                                   | 0,7     | 270         | 74          | 1,20    |
| 160                  | 160                                   | 0,7     | 281         | 75          | 1,30    |
| 180                  | 180                                   | 0,7     | 304         | 73          | 1,60    |
| 200                  | 200                                   | 0,7     | 327         | 76          | 2,00    |
| 224                  | 224                                   | 0,7     | 354         | 79          | 2,50    |
| 250                  | 250                                   | 0,7     | 383         | 82          | 2,90    |
| 300                  | 300                                   | 0,7     | 440         | 82          | 4,40    |
| 315                  | 315                                   | 0,7     | 457         | 84          | 4,70    |
| 350                  | 350                                   | 0,7     | 497         | 89          | 5,40    |
| 400                  | 400                                   | 0,9     | 554         | 96          | 9,00    |
| 450                  | 450                                   | 0,9     | 610         | 102         | 10,8    |
| 500                  | 500                                   | 0,9     | 667         | 109         | 13,1    |
| 560 *                | 560 *                                 | 0,9     | 735         | 155         | 17,0    |
| 600 *                | 600 *                                 | 0,9     | 780         | 160         | 19,5    |
| 630 *                | 630 *                                 | 0,9     | 814         | 164         | 20,5    |
| 650 *                | 650 *                                 | 0,9     | 837         | 167         | 23,0    |
| 710 *                | 710 *                                 | 0,9     | 905         | 195         | 27,0    |
| 750 *                | 750 *                                 | 0,9     | 951         | 201         | 30,0    |
| 800 *                | 800 *                                 | 0,9     | 1007        | 207         | 38,0    |
| 900 *                | 900 *                                 | 0,9     | 1121        | 221         | 47,0    |

\* Supplied with flange FL

## Ordering example

|                         |        |     |     |     |
|-------------------------|--------|-----|-----|-----|
|                         | YVTR30 | 400 | 160 | 160 |
| Product                 |        |     |     |     |
| Dimension $\text{Ød}_1$ |        |     |     |     |
| Dimension $\text{Ød}_2$ |        |     |     |     |
| Dimension $\text{Ød}_3$ |        |     |     |     |



# Saddle

# PSVTR30



## Description

Saddle.


The saddle is fixed with two sealing clamps MFK.

This product should not be installed with screws or blind rivets when used in chip extraction installations.

### NB

To save space, the adjacent table only contains a limited selection from our range the saddles where all dimensions d and d<sub>3</sub> are equal in size. Other dimensions are available to special order.

## Dimensions

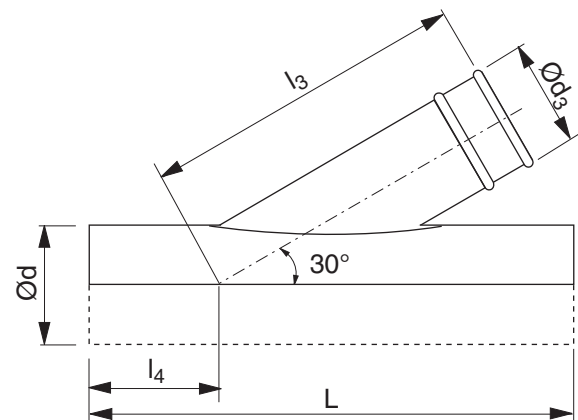

| Ød<br>nom | Ød <sub>3</sub><br>nom | t<br>mm | L<br>mm | l <sub>3</sub><br>mm | l <sub>4</sub><br>mm | m<br>kg |
|-----------|------------------------|---------|---------|----------------------|----------------------|---------|
| 80        | 80                     | 0,7     | 410     | 221                  | 136                  | 0,50    |
| 100       | 100                    | 0,7     | 450     | 263                  | 138                  | 0,60    |
| 125       | 125                    | 0,7     | 500     | 317                  | 142                  | 0,80    |
| 140       | 140                    | 0,7     | 530     | 349                  | 144                  | 0,90    |
| 150       | 150                    | 0,7     | 550     | 370                  | 145                  | 1,00    |
| 160       | 160                    | 0,7     | 570     | 391                  | 146                  | 1,20    |
| 180       | 180                    | 0,7     | 610     | 434                  | 149                  | 1,50    |
| 200       | 200                    | 0,7     | 650     | 477                  | 152                  | 1,70    |
| 224       | 224                    | 0,7     | 700     | 528                  | 156                  | 2,10    |
| 250       | 250                    | 0,7     | 750     | 584                  | 159                  | 2,40    |
| 300       | 300                    | 0,7     | 850     | 690                  | 165                  | 3,10    |
| 315       | 315                    | 0,7     | 880     | 722                  | 167                  | 3,60    |
| 350       | 350                    | 0,7     | 950     | 797                  | 172                  | 5,60    |
| 400       | 400                    | 0,9     | 1050    | 904                  | 179                  | 6,50    |
| 450       | 450                    | 0,9     | 1150    | 1010                 | 185                  | 8,20    |
| 500       | 500                    | 0,9     | 1250    | 1117                 | 192                  | 9,80    |
| 560       | 560 *                  | 0,9     | 1370    | 1245                 | 200                  | 11,2    |
| 600       | 600 *                  | 0,9     | 1450    | 1330                 | 205                  | 13,8    |
| 630       | 630 *                  | 0,9     | 1510    | 1394                 | 209                  | 14,0    |
| 650       | 650 *                  | 0,9     | 1550    | 1437                 | 212                  | 16,0    |
| 710       | 710 *                  | 0,9     | 1670    | 1565                 | 220                  | 18,0    |
| 750       | 750 *                  | 0,9     | 1750    | 1651                 | 225                  | 21,0    |
| 800       | 800 *                  | 0,9     | 1850    | 1757                 | 232                  | 24,0    |
| 900       | 900 *                  | 0,9     | 2050    | 1971                 | 245                  | 28,0    |

\* Supplied with flange FL

## Ordering example

|                           |         |     |     |
|---------------------------|---------|-----|-----|
| Product                   | PSVTR30 | 400 | 160 |
| Dimension Ød              |         |     |     |
| Dimension Ød <sub>3</sub> |         |     |     |

# Collar saddle


PSTR



## Description

Collar saddle.

## Dimensions

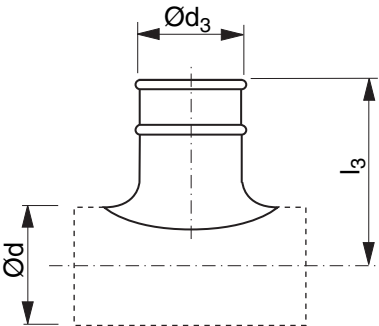

| Ød<br>nom | Ød <sub>3</sub><br>mm | t<br>mm | l <sub>3</sub><br>mm | m<br>kg |
|-----------|-----------------------|---------|----------------------|---------|
| 80        | 80                    | 0,6     | 143                  | 0,20    |
| 100       | 80                    | 0,6     | 156                  | 0,20    |
| 100       | 100                   | 0,6     | 131                  | 0,30    |
| 125       | 80                    | 0,6     | 166                  | 0,20    |
| 125       | 100                   | 0,6     | 144                  | 0,30    |
| 125       | 125                   | 0,6     | 149                  | 0,40    |
| 140       | 80                    | 0,6     | 173                  | 0,20    |
| 140       | 100                   | 0,6     | 176                  | 0,40    |
| 140       | 125                   | 0,6     | 121                  | 0,30    |
| 140       | 140                   | 0,6     | 181                  | 0,50    |
| 150       | 80                    | 0,6     | 178                  | 0,20    |
| 150       | 100                   | 0,6     | 181                  | 0,40    |
| 150       | 125                   | 0,6     | 186                  | 0,50    |
| 150       | 140                   | 0,6     | 186                  | 0,50    |
| 150       | 150                   | 0,6     | 186                  | 0,50    |
| 160       | 80                    | 0,6     | 183                  | 0,20    |
| 160       | 100                   | 0,6     | 161                  | 0,30    |
| 160       | 125                   | 0,6     | 166                  | 0,40    |
| 160       | 140                   | 0,6     | 191                  | 0,50    |
| 160       | 150                   | 0,6     | 191                  | 0,50    |
| 160       | 160                   | 0,6     | 171                  | 0,50    |
| 180       | 80                    | 0,6     | 193                  | 0,20    |
| 180       | 100                   | 0,6     | 196                  | 0,40    |
| 180       | 125                   | 0,6     | 201                  | 0,50    |
| 180       | 140                   | 0,6     | 201                  | 0,50    |
| 180       | 150                   | 0,6     | 201                  | 0,50    |
| 180       | 160                   | 0,6     | 206                  | 0,60    |
| 180       | 180                   | 0,6     | 202                  | 0,90    |
| 200       | 80                    | 0,6     | 203                  | 0,20    |
| 200       | 100                   | 0,6     | 181                  | 0,30    |
| 200       | 125                   | 0,6     | 181                  | 0,40    |
| 200       | 140                   | 0,6     | 211                  | 0,50    |
| 200       | 150                   | 0,6     | 211                  | 0,50    |
| 200       | 160                   | 0,6     | 191                  | 0,50    |

## Ordering example

|                           |      |     |     |
|---------------------------|------|-----|-----|
| Product                   | PSTR | 400 | 160 |
| Dimension Ød              |      |     |     |
| Dimension Ød <sub>3</sub> |      |     |     |

## Collar saddle

## PSTR

| Ød<br>nom | Ød <sub>3</sub><br>mm | t<br>mm | l <sub>3</sub><br>mm | m<br>kg |
|-----------|-----------------------|---------|----------------------|---------|
| 200       | 180                   | 0,6     | 212                  | 0,90    |
| 200       | 200                   | 0,6     | 212                  | 1,00    |
| 224       | 80                    | 0,6     | 215                  | 0,20    |
| 224       | 100                   | 0,6     | 218                  | 0,40    |
| 224       | 125                   | 0,6     | 223                  | 0,50    |
| 224       | 140                   | 0,6     | 223                  | 0,50    |
| 224       | 150                   | 0,6     | 223                  | 0,50    |
| 224       | 160                   | 0,6     | 228                  | 0,60    |
| 224       | 180                   | 0,6     | 224                  | 0,80    |
| 224       | 200                   | 0,6     | 224                  | 0,80    |
| 224       | 224                   | 0,6     | 224                  | 1,00    |
| 250       | 80                    | 0,6     | 228                  | 0,30    |
| 250       | 100                   | 0,6     | 206                  | 0,40    |
| 250       | 125                   | 0,6     | 211                  | 0,40    |
| 250       | 140                   | 0,6     | 236                  | 0,50    |
| 250       | 150                   | 0,6     | 236                  | 0,50    |
| 250       | 160                   | 0,6     | 241                  | 0,60    |
| 250       | 180                   | 0,6     | 237                  | 0,90    |
| 250       | 200                   | 0,6     | 237                  | 0,90    |
| 250       | 224                   | 0,6     | 237                  | 1,20    |
| 250       | 250                   | 0,6     | 257                  | 1,30    |
| 300       | 80                    | 0,6     | 201                  | 0,20    |
| 300       | 100                   | 0,6     | 201                  | 0,20    |
| 300       | 125                   | 0,6     | 201                  | 0,30    |
| 300       | 140                   | 0,6     | 201                  | 0,40    |
| 300       | 150                   | 0,6     | 201                  | 0,40    |
| 300       | 160                   | 0,6     | 201                  | 0,40    |
| 300       | 180                   | 0,6     | 197                  | 0,60    |
| 300       | 200                   | 0,6     | 197                  | 0,60    |
| 300       | 224                   | 0,6     | 197                  | 0,70    |
| 300       | 250                   | 0,6     | 197                  | 0,80    |
| 315       | 80                    | 0,6     | 261                  | 0,30    |
| 315       | 100                   | 0,6     | 264                  | 0,40    |
| 315       | 125                   | 0,6     | 244                  | 0,40    |
| 315       | 140                   | 0,6     | 269                  | 0,50    |
| 315       | 150                   | 0,6     | 269                  | 0,50    |
| 315       | 160                   | 0,6     | 273                  | 0,50    |
| 315       | 180                   | 0,6     | 273                  | 0,90    |
| 315       | 200                   | 0,6     | 269                  | 0,90    |
| 315       | 224                   | 0,6     | 269                  | 0,90    |
| 315       | 250                   | 0,6     | 289                  | 1,10    |
| 315       | 300                   | 0,6     | 259                  | 1,50    |
| 315       | 315                   | 0,6     | 283                  | 1,90    |
| 350       | 100                   | 0,6     | 226                  | 0,30    |
| 350       | 125                   | 0,6     | 226                  | 0,30    |
| 350       | 140                   | 0,6     | 226                  | 0,40    |
| 350       | 150                   | 0,6     | 226                  | 0,40    |
| 350       | 160                   | 0,6     | 226                  | 0,40    |
| 350       | 180                   | 0,6     | 222                  | 0,60    |
| 350       | 200                   | 0,6     | 222                  | 0,70    |

| Ød<br>nom | Ød <sub>3</sub><br>mm | t<br>mm | l <sub>3</sub><br>mm | m<br>kg |
|-----------|-----------------------|---------|----------------------|---------|
| 350       | 224                   | 0,6     | 222                  | 0,70    |
| 350       | 250                   | 0,6     | 222                  | 0,80    |
| 350       | 300                   | 0,6     | 216                  | 0,90    |
| 350       | 315                   | 0,6     | 216                  | 1,10    |
| 350       | 350                   | 0,6     | 216                  | 1,60    |
| 400       | 125                   | 0,6     | 311                  | 0,40    |
| 400       | 140                   | 0,6     | 251                  | 0,30    |
| 400       | 150                   | 0,6     | 311                  | 0,40    |
| 400       | 160                   | 0,6     | 316                  | 0,50    |
| 400       | 180                   | 0,6     | 247                  | 0,40    |
| 400       | 200                   | 0,6     | 312                  | 0,90    |
| 400       | 224                   | 0,6     | 312                  | 0,90    |
| 400       | 250                   | 0,6     | 332                  | 1,10    |
| 400       | 300                   | 0,6     | 301                  | 1,10    |
| 400       | 315                   | 0,6     | 326                  | 1,60    |
| 400       | 350                   | 0,6     | 326                  | 1,90    |
| 400       | 400                   | 0,7     | 321                  | 2,40    |
| 450       | 100                   | 0,6     | 331                  | 0,40    |
| 450       | 125                   | 0,6     | 336                  | 0,50    |
| 450       | 140                   | 0,6     | 276                  | 0,40    |
| 450       | 150                   | 0,6     | 336                  | 0,40    |
| 450       | 160                   | 0,6     | 341                  | 0,50    |
| 450       | 180                   | 0,6     | 272                  | 0,40    |
| 450       | 200                   | 0,6     | 337                  | 0,90    |
| 450       | 224                   | 0,6     | 337                  | 0,90    |
| 450       | 250                   | 0,6     | 357                  | 1,10    |
| 450       | 300                   | 0,6     | 266                  | 1,00    |
| 450       | 315                   | 0,6     | 351                  | 1,50    |
| 450       | 400                   | 0,7     | 371                  | 2,30    |
| 450       | 450                   | 0,7     | 266                  | 1,40    |
| 500       | 100                   | 0,6     | 356                  | 0,40    |
| 500       | 125                   | 0,6     | 361                  | 0,50    |
| 500       | 140                   | 0,6     | 301                  | 0,30    |
| 500       | 150                   | 0,6     | 361                  | 0,40    |
| 500       | 160                   | 0,6     | 366                  | 0,50    |
| 500       | 180                   | 0,6     | 297                  | 0,50    |
| 500       | 200                   | 0,6     | 362                  | 0,90    |
| 500       | 224                   | 0,6     | 322                  | 0,70    |
| 500       | 250                   | 0,6     | 382                  | 1,10    |
| 500       | 300                   | 0,6     | 291                  | 0,90    |
| 500       | 315                   | 0,6     | 376                  | 1,50    |
| 500       | 350                   | 0,7     | 291                  | 1,70    |
| 500       | 400                   | 0,7     | 396                  | 2,30    |
| 500       | 450                   | 0,7     | 291                  | 1,50    |
| 500       | 500                   | 0,7     | 291                  | 1,70    |
| 560       | 250                   | 0,7     | 412                  | 1,50    |
| 560       | 300                   | 0,7     | 321                  | 1,30    |
| 560       | 315                   | 0,7     | 406                  | 1,90    |
| 560       | 350                   | 0,7     | 381                  | 2,00    |
| 560       | 400                   | 0,9     | 426                  | 3,10    |

## Collar saddle

## PSTR

| Ød<br>nom | Ød <sub>3</sub><br>mm | t<br>mm | l <sub>3</sub><br>mm | m<br>kg |
|-----------|-----------------------|---------|----------------------|---------|
| 560       | 450                   | 0,9     | 321                  | 2,70    |
| 560       | 500                   | 0,9     | 321                  | 3,10    |
| 560       | 560 *                 | 0,9     | 321                  | 5,70    |
| 600       | 300                   | 0,7     | 341                  | 1,40    |
| 600       | 315                   | 0,7     | 426                  | 1,90    |
| 600       | 350                   | 0,7     | 341                  | 1,70    |
| 600       | 400                   | 0,9     | 446                  | 3,10    |
| 600       | 450                   | 0,9     | 341                  | 2,70    |
| 600       | 500                   | 0,9     | 341                  | 3,30    |
| 600       | 560 *                 | 0,9     | 341                  | 5,80    |
| 600       | 600 *                 | 0,9     | 341                  | 6,30    |
| 630       | 315                   | 0,7     | 441                  | 2,10    |
| 630       | 350                   | 0,7     | 356                  | 1,80    |
| 630       | 400                   | 0,9     | 461                  | 3,30    |
| 630       | 450                   | 0,9     | 356                  | 2,80    |
| 630       | 500                   | 0,9     | 356                  | 3,50    |
| 630       | 560 *                 | 0,9     | 356                  | 5,90    |
| 630       | 600 *                 | 0,9     | 356                  | 6,40    |
| 630       | 630 *                 | 0,9     | 356                  | 6,80    |
| 650       | 350                   | 0,7     | 366                  | 1,90    |
| 650       | 400                   | 0,9     | 366                  | 2,60    |
| 650       | 450                   | 0,9     | 366                  | 2,90    |
| 650       | 500                   | 0,9     | 366                  | 3,60    |
| 650       | 560 *                 | 0,9     | 366                  | 6,00    |
| 650       | 600 *                 | 0,9     | 366                  | 6,50    |
| 650       | 630 *                 | 0,9     | 366                  | 6,90    |
| 650       | 650 *                 | 0,9     | 366                  | 7,20    |
| 710       | 400                   | 0,9     | 396                  | 3,00    |
| 710       | 450                   | 0,9     | 396                  | 3,10    |
| 710       | 500                   | 0,9     | 396                  | 3,80    |
| 710       | 560 *                 | 0,9     | 396                  | 6,10    |
| 710       | 600 *                 | 0,9     | 396                  | 6,70    |
| 710       | 630 *                 | 0,9     | 396                  | 7,10    |
| 710       | 650 *                 | 0,9     | 396                  | 7,40    |
| 710       | 710 *                 | 0,9     | 396                  | 8,50    |
| 750       | 450                   | 0,9     | 416                  | 3,20    |
| 750       | 500                   | 0,9     | 416                  | 3,80    |
| 750       | 560 *                 | 0,9     | 416                  | 6,20    |
| 750       | 600 *                 | 0,9     | 416                  | 6,70    |
| 750       | 630 *                 | 0,9     | 416                  | 7,10    |
| 750       | 650 *                 | 0,9     | 416                  | 7,40    |
| 750       | 710 *                 | 0,9     | 416                  | 8,60    |
| 750       | 750 *                 | 0,9     | 416                  | 9,00    |
| 800       | 500                   | 0,9     | 441                  | 3,80    |
| 800       | 560 *                 | 0,9     | 441                  | 6,30    |
| 800       | 630 *                 | 0,9     | 441                  | 7,30    |
| 800       | 650 *                 | 0,9     | 441                  | 7,70    |
| 800       | 710 *                 | 0,9     | 441                  | 8,70    |
| 800       | 750 *                 | 0,9     | 441                  | 9,20    |
| 800       | 800 *                 | 0,9     | 441                  | 10,1    |

| Ød<br>nom | Ød <sub>3</sub><br>mm | t<br>mm | l <sub>3</sub><br>mm | m<br>kg |
|-----------|-----------------------|---------|----------------------|---------|
| 900       | 560 *                 | 0,9     | 491                  | 6,60    |
| 900       | 600 *                 | 0,9     | 491                  | 7,20    |
| 900       | 630 *                 | 0,9     | 491                  | 7,60    |
| 900       | 650 *                 | 0,9     | 491                  | 8,00    |
| 900       | 710 *                 | 0,9     | 491                  | 9,10    |
| 900       | 750 *                 | 0,9     | 491                  | 9,70    |
| 900       | 800 *                 | 0,9     | 491                  | 10,6    |
| 900       | 900 *                 | 0,9     | 491                  | 12,2    |

\* Supplied with flange FL

# Take-off


ILTR



## Description

Take-off.

## Dimensions



| Ød<br>nom | t<br>mm | l<br>mm | m<br>kg |
|-----------|---------|---------|---------|
| 80        | 0,7     | 50      | 0,10    |
| 100       | 0,7     | 50      | 0,10    |
| 125       | 0,7     | 50      | 0,20    |
| 140       | 0,7     | 50      | 0,20    |
| 150       | 0,7     | 50      | 0,20    |
| 160       | 0,7     | 50      | 0,20    |
| 180       | 0,7     | 45      | 0,30    |
| 200       | 0,7     | 45      | 0,30    |
| 224       | 0,7     | 45      | 0,30    |
| 250       | 0,7     | 45      | 0,40    |
| 300       | 0,7     | 40      | 0,40    |
| 315       | 0,7     | 40      | 0,50    |
| 350       | 0,7     | 40      | 0,50    |
| 400       | 0,9     | 40      | 0,70    |
| 450       | 0,9     | 40      | 0,80    |
| 500       | 0,9     | 40      | 0,90    |

## Ordering example

|              |      |     |
|--------------|------|-----|
| Product      | ILTR | 315 |
| Dimension Ød |      |     |

# End cover


EPTR



## Description

End cover.

## Dimensions



| Ød<br>nom | t<br>mm | l<br>mm | m<br>kg |
|-----------|---------|---------|---------|
| 80        | 0,7     | 56      | 0,30    |
| 100       | 0,7     | 56      | 0,40    |
| 125       | 0,7     | 56      | 0,40    |
| 140       | 0,7     | 56      | 0,40    |
| 150       | 0,7     | 56      | 0,50    |
| 160       | 0,7     | 56      | 0,60    |
| 180       | 0,7     | 52      | 0,60    |
| 200       | 0,7     | 52      | 0,80    |
| 224       | 0,7     | 52      | 0,80    |
| 250       | 0,7     | 52      | 0,80    |
| 300       | 0,9     | 46      | 0,90    |
| 315       | 0,9     | 46      | 1,00    |
| 350       | 0,9     | 46      | 1,00    |
| 400       | 0,9     | 46      | 1,40    |
| 450       | 0,9     | 46      | 1,60    |
| 500       | 0,9     | 46      | 1,80    |
| 560 *     | 0,9     | 70      | 5,40    |
| 600 *     | 0,9     | 70      | 6,10    |
| 630 *     | 0,9     | 70      | 6,30    |
| 650 *     | 0,9     | 70      | 6,70    |
| 710 *     | 0,9     | 90      | 7,80    |
| 750 *     | 0,9     | 90      | 8,30    |
| 800 *     | 0,9     | 90      | 9,00    |
| 900 *     | 0,9     | 90      | 10,7    |

\* Supplied with flange FL

## Ordering example

|              |      |     |
|--------------|------|-----|
| Product      | EPTR | 315 |
| Dimension Ød |      |     |

# Transition piece


OUTR



## Description

Coupling between Transfer and Safe systems.

## Dimensions



| Ød <sub>1</sub><br>nom | Ød <sub>2</sub><br>nom | t<br>mm | l<br>mm | l <sub>i</sub><br>mm | m<br>kg |
|------------------------|------------------------|---------|---------|----------------------|---------|
| 80                     | 80                     | 0,7     | 40      | 40                   | 0,15    |
| 100                    | 100                    | 0,7     | 40      | 40                   | 0,15    |
| 125                    | 125                    | 0,7     | 40      | 40                   | 0,20    |
| 140                    | 140                    | 0,7     | 40      | 40                   | 0,20    |
| 150                    | 150                    | 0,7     | 40      | 40                   | 0,30    |
| 160                    | 160                    | 0,7     | 40      | 40                   | 0,30    |
| 180                    | 180                    | 0,7     | 40      | 40                   | 0,30    |
| 200                    | 200                    | 0,7     | 40      | 40                   | 0,30    |
| 224                    | 224                    | 0,7     | 40      | 40                   | 0,40    |
| 250                    | 250                    | 0,7     | 60      | 60                   | 0,40    |
| 300                    | 300                    | 0,7     | 46      | 60                   | 0,70    |
| 315                    | 315                    | 0,7     | 46      | 60                   | 0,50    |
| 350                    | 350                    | 0,9     | 46      | 60                   | 0,80    |
| 400                    | 400                    | 0,9     | 46      | 80                   | 1,20    |
| 450                    | 450                    | 0,9     | 46      | 80                   | 1,40    |
| 500                    | 500                    | 0,9     | 46      | 80                   | 1,60    |
| 560                    | 560                    | 0,9     | 80      | 80                   | 4,6     |
| 600                    | 600                    | 0,9     | 80      | 80                   | 4,9     |
| 630                    | 630                    | 0,9     | 80      | 80                   | 5,1     |
| 650                    | 650                    | 0,9     | 80      | 80                   | 5,4     |
| 710                    | 710                    | 0,9     | 100     | 100                  | 6,1     |
| 750                    | 750                    | 0,9     | 100     | 100                  | 6,8     |
| 800                    | 800                    | 0,9     | 100     | 100                  | 7,5     |
| 900                    | 900                    | 0,9     | 125     | 125                  | 8,5     |

## Ordering example

|              |      |     |
|--------------|------|-----|
| Product      | OUTR | 315 |
| Dimension Ød |      |     |

# Transition piece


MFTR



## Description

Coupling with female end between Transfer and Safe systems.

## Dimensions



| Ød<br>nom | t<br>mm | l<br>mm | m<br>kg |
|-----------|---------|---------|---------|
| 80        | 0,7     | 62      | 0,10    |
| 100       | 0,7     | 62      | 0,10    |
| 125       | 0,7     | 62      | 0,20    |
| 140       | 0,7     | 62      | 0,20    |
| 150       | 0,7     | 62      | 0,20    |
| 160       | 0,7     | 62      | 0,20    |
| 180       | 0,7     | 58      | 0,20    |
| 200       | 0,7     | 58      | 0,20    |
| 224       | 0,7     | 58      | 0,30    |
| 250       | 0,7     | 79      | 0,30    |
| 300 *     | 0,9     | 106     | 0,70    |
| 315       | 0,9     | 73      | 0,30    |
| 350 *     | 0,9     | 115     | 0,9     |
| 400 *     | 0,9     | 126     | 1,20    |
| 450 *     | 0,9     | 126     | 1,40    |
| 500 *     | 0,9     | 126     | 1,60    |

\* Folded design

## Ordering example

|              |      |     |
|--------------|------|-----|
| Product      | MFTR | 315 |
| Dimension Ød |      |     |



# Transition piece

OTR



## Description

Coupling between Transfer and other joining system.


As standard the length is 100 mm. If a specific length is desired it can be stated when order. The length depends on dimensions and joining system. Minimum length is 50 mm.

Ød : dimension for Transfer

ØA : dimension for other system

At order state the type of the other joining system.

## Dimensions



| Ød<br>nom | t<br>mm |
|-----------|---------|
| 80        | 0,7     |
| 100       | 0,7     |
| 125       | 0,7     |
| 140       | 0,7     |
| 150       | 0,7     |
| 160       | 0,7     |
| 180       | 0,7     |
| 200       | 0,7     |
| 224       | 0,7     |
| 250       | 0,7     |
| 300       | 0,9     |
| 315       | 0,9     |
| 350       | 0,9     |
| 400       | 0,9     |
| 450       | 0,9     |
| 500       | 0,9     |

## Ordering example

|                      |     |     |     |     |    |
|----------------------|-----|-----|-----|-----|----|
|                      | OTR | 250 | 250 | 100 | FL |
| Product              |     |     |     |     |    |
| Dimension Ød         |     |     |     |     |    |
| Dimension ØA         |     |     |     |     |    |
| Length l             |     |     |     |     |    |
| Other joining system |     |     |     |     |    |

# Transition piece

LORTR




### Description

Coupling between Transfer and rectangular connection.

The measures e and h only need to be specified for alternative 6. A negative value for e, for example, means that e is outside side a.

The measures e and h only need to be specified for alternative 6. A negative value for e, for example, means that e is outside side a.

### Dimensions

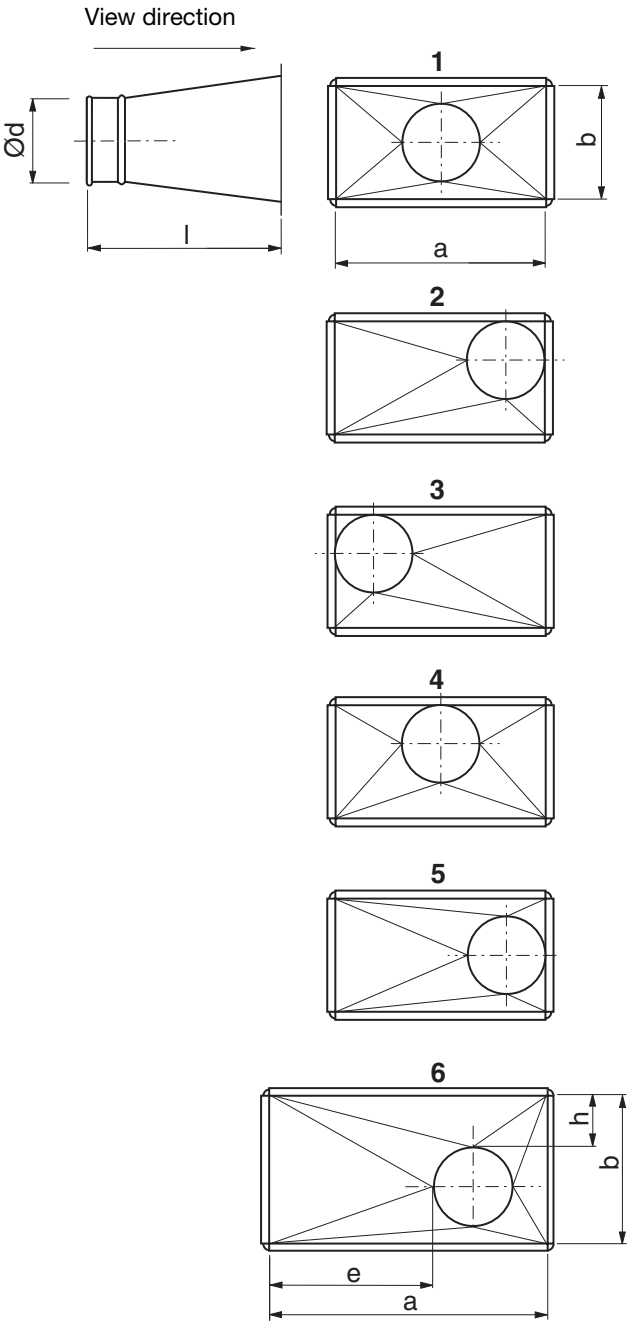

### Ordering example

|                                                          |       |     |     |     |   |
|----------------------------------------------------------|-------|-----|-----|-----|---|
| Product                                                  | LORTR | 500 | 300 | 160 | 1 |
| Largest side                                             | a     |     |     |     |   |
| Smallest side                                            | b     |     |     |     |   |
| Diameter in mm                                           | Ød    |     |     |     |   |
| The alt. displacement are seen from the circular end 1-6 |       |     |     |     |   |

| a, b<br>Largest side<br>mm | l<br>mm |
|----------------------------|---------|
| 100 – 350                  | 300     |
| 351 – 750                  | 450     |
| 751 – 1200                 | 600     |

# Extraction hood

SH




## Description

Extraction hood for all types of extraction.

Available in two standard sizes with various accessories such as a damper, net and magnet.

## Dimensions

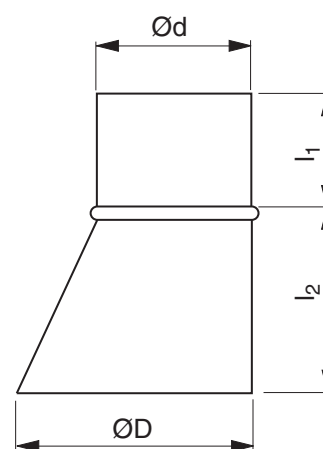

| Ød<br>nom | ØD<br>nom | l <sub>1</sub><br>mm | l <sub>2</sub><br>mm | m<br>kg |
|-----------|-----------|----------------------|----------------------|---------|
| 80        | 160       | 80                   | 95                   | 0,31    |
| 160 *     | 315       | 120                  | 155                  | 1,00    |

\* Supplied with handle

## Ordering example

|              |    |     |
|--------------|----|-----|
| Product      | SH | 160 |
| Dimension Ød |    |     |

# Extraction hood

SHTR




## Description

Extraction hood.

To order, specify  $\varnothing d$  and dimensions for stubs  $\varnothing d_1$ ,  $\varnothing d_2$ ,  $\varnothing d_3$  etc. and the sequence they should be located on the pitch circle.

## Dimensions

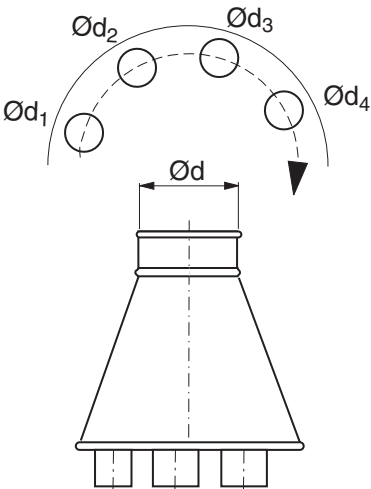

| $\varnothing d$<br>nom | t<br>mm |
|------------------------|---------|
| 80                     | 0,7     |
| 100                    | 0,7     |
| 125                    | 0,7     |
| 140                    | 0,7     |
| 150                    | 0,7     |
| 160                    | 0,7     |
| 180                    | 0,7     |
| 200                    | 0,7     |
| 224                    | 0,7     |
| 250                    | 0,7     |
| 300                    | 0,7     |
| 315                    | 0,7     |
| 350                    | 0,7     |
| 400                    | 0,9     |
| 450                    | 0,9     |
| 500                    | 0,9     |

## Ordering example

|                                                                     |      |     |                 |
|---------------------------------------------------------------------|------|-----|-----------------|
| Product                                                             | SHTR | 250 | xxx - xxx - xxx |
| Dimension $\varnothing d$                                           |      |     |                 |
| Dimension $\varnothing d_1$ , $\varnothing d_2$ , $\varnothing d_3$ |      |     |                 |

# Extraction hood

SPTR




### Description

Extraction hood.

To order, specify  $\varnothing d$  and dimensions for stubs  $\varnothing d_1$ ,  $\varnothing d_2$ ,  $\varnothing d_3$  etc. and the sequence they should be located on the pitch circle.

### Dimensions

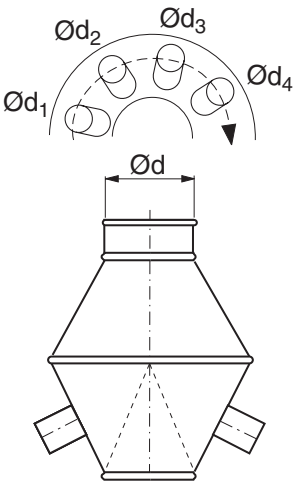

| $\varnothing d$<br>nom | t<br>mm |
|------------------------|---------|
| 80                     | 0,7     |
| 100                    | 0,7     |
| 125                    | 0,7     |
| 140                    | 0,7     |
| 150                    | 0,7     |
| 160                    | 0,7     |
| 180                    | 0,7     |
| 200                    | 0,7     |
| 224                    | 0,7     |
| 250                    | 0,7     |
| 300                    | 0,7     |
| 315                    | 0,7     |
| 350                    | 0,7     |
| 400                    | 0,9     |
| 450                    | 0,9     |
| 500                    | 0,9     |

### Ordering example

|                                                                     |      |     |                 |
|---------------------------------------------------------------------|------|-----|-----------------|
|                                                                     | SPTR | 315 | xxx - xxx - xxx |
| Product                                                             |      |     |                 |
| Dimension $\varnothing d$                                           |      |     |                 |
| Dimension $\varnothing d_1$ , $\varnothing d_2$ , $\varnothing d_3$ |      |     |                 |

# Waste extractor


GSTR



### Description

Used for extraction of chips etc. Is to be placed up to a wall.

### Dimensions

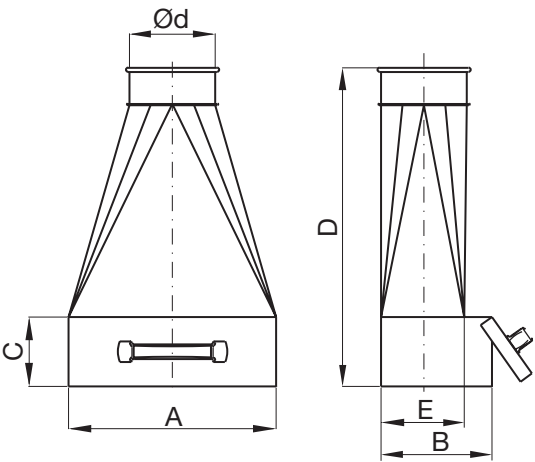


| Ød<br>nom | A<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm |
|-----------|---------|---------|---------|---------|---------|
| 100       | 300     | 165     | 100     | 460     | 120     |
| 125       | 300     | 165     | 100     | 460     | 120     |
| 160       | 300     | 165     | 100     | 460     | 120     |

### Ordering example

|              |      |     |
|--------------|------|-----|
| Product      | GSTR | 125 |
| Dimension Ød |      |     |

# Flexible hose

# THTR

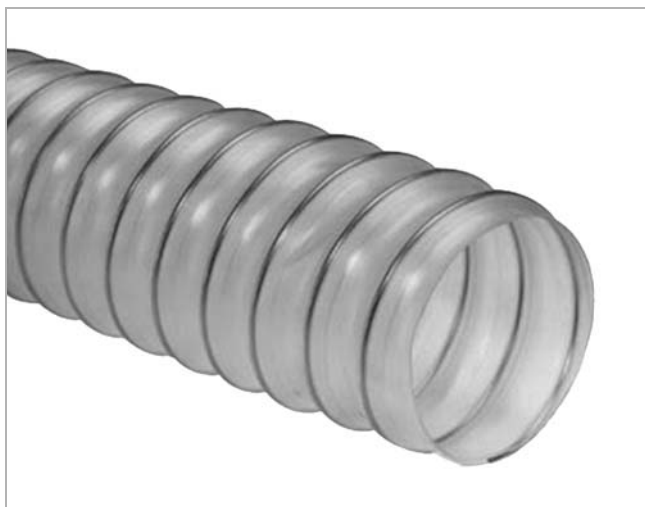

## Description

Light, flexible hose built on a bright steel spiral. Transparent with a light bluish tone.

Material polyester – polyurethane

Temperature range -40 to +100 °C

Fits standard fitting dimensions.

## Dimensions




| Ød<br>mm | Min.<br>bending<br>radius<br>mm | Max. per-<br>missible<br>negative<br>pressure<br>kPa | l<br>mm | m <sub>l</sub><br>kg/m |
|----------|---------------------------------|------------------------------------------------------|---------|------------------------|
| 80       | 80                              | 14,5                                                 | 6000    | 0,50                   |
| 100      | 100                             | 12,0                                                 | 6000    | 0,60                   |
| 125      | 125                             | 10,0                                                 | 6000    | 0,70                   |
| 140      | 140                             | 8,0                                                  | 6000    | 0,80                   |
| 150      | 150                             | 7,8                                                  | 6000    | 0,90                   |
| 160      | 160                             | 7,5                                                  | 6000    | 0,90                   |
| 180      | 180                             | 6,5                                                  | 6000    | 1,00                   |
| 200      | 200                             | 6,2                                                  | 6000    | 1,10                   |
| 250      | 250                             | 5,0                                                  | 6000    | 1,40                   |

## Ordering example

|              |      |     |
|--------------|------|-----|
| Product      | THTR | 160 |
| Dimension Ød |      |     |

# Flexible hose

THVTR

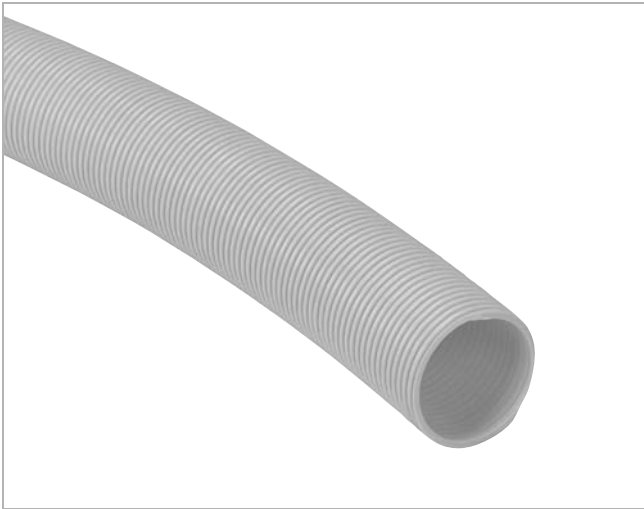


### Description

Flexible hose, non-spiral, profiled wall construction, extruded ethylene-vinyl-acetate The design means that the hose has an almost completely smooth interior under high vacuum, with consequent low pressure drop. This is because the open ridges on the inside of the hose are compressed at negative pressure.

Colour                      blue  
Temperature range    -45 to +65 °C

### Dimensions



| Ød<br>mm | ØD<br>mm | Min.<br>bending<br>radius<br>mm | Max. per-<br>missible<br>negative<br>pressure<br>kPa | l<br>mm | m <sub>l</sub><br>kg/m |
|----------|----------|---------------------------------|------------------------------------------------------|---------|------------------------|
| 25       | 31       | 66                              | 50                                                   | 30000   | 0,20                   |
| 32       | 41       | 82                              | 50                                                   | 30000   | 0,30                   |
| 38       | 48       | 93                              | 50                                                   | 30000   | 0,40                   |
| 45       | 56       | 111                             | 50                                                   | 30000   | 0,50                   |
| 50       | 61       | 122                             | 50                                                   | 30000   | 0,60                   |
| 63       | 76       | 160                             | 50                                                   | 30000   | 0,80                   |
| 76       | 91       | 188                             | 50                                                   | 15000   | 1,10                   |
| 100      | 115      | 252                             | 50                                                   | 15000   | 1,50                   |

### Ordering example

|              |       |     |
|--------------|-------|-----|
|              | THVTR | 100 |
| Product      |       |     |
| Dimension Ød |       |     |



# Transition piece


OTRTH



## Description

Coupling between Transfer and flexible hose THVTR.

## Dimensions



| Ød <sub>1</sub><br>nom | m<br>kg |
|------------------------|---------|
| 25                     | 0,19    |
| 32                     | 0,20    |
| 38                     | 0,20    |
| 45                     | 0,20    |
| 50                     | 0,21    |
| 63                     | 0,21    |
| 76                     | 0,22    |

Dim 80–250 use TSRTTR page 480.

## Ordering example

|                           |       |    |
|---------------------------|-------|----|
| Product                   | OTRTH | 50 |
| Dimension Ød <sub>1</sub> |       |    |

# Clip

SB




### Description

The clip is provided with a rubber gasket. The clip handles can be secured against inadvertent opening by means of a lock pin.

Temperature range   -30 to +75 °C continuous  
                              -40 to +85 °C intermittent

### Dimensions

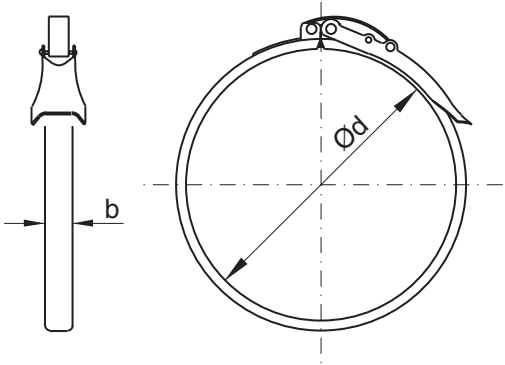

| Ød<br>nom | b<br>mm | m<br>kg |
|-----------|---------|---------|
| 80        | 14      | 0,10    |
| 100       | 14      | 0,10    |
| 125       | 14      | 0,10    |
| 140       | 14      | 0,10    |
| 150       | 14      | 0,10    |
| 160       | 14      | 0,10    |
| 180       | 19      | 0,20    |
| 200       | 19      | 0,30    |
| 224       | 19      | 0,30    |
| 250       | 19      | 0,30    |
| 300       | 25      | 0,40    |
| 315       | 25      | 0,50    |
| 350       | 25      | 0,60    |
| 400       | 25      | 0,60    |
| 450       | 25      | 0,70    |
| 500       | 25      | 0,80    |

### Ordering example

|              |    |     |
|--------------|----|-----|
| Product      | SB | 400 |
| Dimension Ød |    |     |

## Clip

SB1




## Description

Provided with a rubber gasket of EPDM rubber and a thread spring. The clip handle can be secured against inadvertent opening by means of a lock pin.

Temperature range -30 to +75 °C continuous  
-40 to +85 °C intermittent

## Dimensions

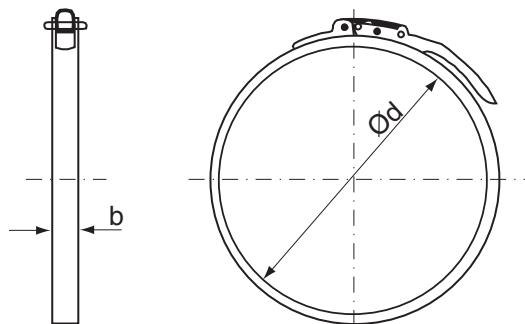

| Ød<br>nom | b<br>mm | m<br>kg |
|-----------|---------|---------|
| 80        | 14      | 0,10    |
| 100       | 14      | 0,10    |
| 125       | 14      | 0,10    |
| 140       | 14      | 0,10    |
| 150       | 14      | 0,10    |
| 160       | 14      | 0,10    |
| 180       | 19      | 0,20    |
| 200       | 19      | 0,30    |
| 224       | 19      | 0,30    |
| 250       | 19      | 0,30    |
| 300       | 25      | 0,40    |
| 315       | 25      | 0,50    |
| 350       | 25      | 0,60    |
| 400       | 25      | 0,60    |
| 450       | 25      | 0,70    |
| 500       | 25      | 0,80    |

## Ordering example

|              |     |     |
|--------------|-----|-----|
| Product      | SB1 | 250 |
| Dimension Ød |     |     |

# Clip

SB-2




## Description

The clip is provided with a rubber gasket. The clip is tensioned by means of a hexagonal socket cap screw. Suitable for tightening with a screw tightener.

Temperature range   -30 to +75 °C continuous  
                              -40 to +85 °C intermittent

## Dimensions

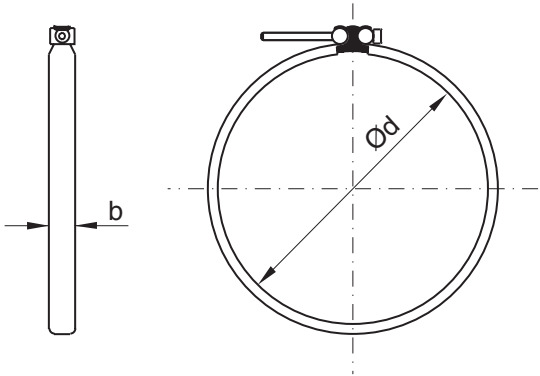

| Ød<br>nom | b<br>mm | Key size<br>mm | m<br>kg |
|-----------|---------|----------------|---------|
| 80        | 14      | 3              | 0,10    |
| 100       | 14      | 3              | 0,10    |
| 125       | 14      | 3              | 0,10    |
| 140       | 14      | 3              | 0,10    |
| 150       | 14      | 3              | 0,10    |
| 160       | 14      | 3              | 0,10    |
| 180       | 19      | 3              | 0,20    |
| 200       | 19      | 3              | 0,30    |
| 224       | 19      | 3              | 0,30    |
| 250       | 19      | 3              | 0,30    |
| 300       | 25      | 5              | 0,40    |
| 315       | 25      | 5              | 0,50    |
| 350       | 25      | 5              | 0,60    |
| 400       | 25      | 5              | 0,60    |
| 450       | 25      | 5              | 0,70    |
| 500       | 25      | 5              | 0,80    |

## Ordering example

|              |      |     |
|--------------|------|-----|
| Product      | SB-2 | 200 |
| Dimension Ød |      |     |

# Sealing clamp

MFK




## Description

The inside of the sealing clamp is clad with longlife resistant EPDM rubber.

Used for sealing joints on slide-on stub PTR and saddle PSVTR.

## Dimensions



| Ød<br>mm | m<br>kg |
|----------|---------|
| 80       | 0,30    |
| 100      | 0,30    |
| 125      | 0,40    |
| 140      | 0,40    |
| 150      | 0,50    |
| 160      | 0,50    |
| 180      | 0,50    |
| 200      | 0,50    |
| 224      | 0,60    |
| 250      | 0,60    |
| 300      | 0,60    |
| 315      | 0,70    |
| 350      | 0,70    |
| 400      | 0,80    |
| 450      | 1,10    |
| 500      | 1,20    |

## Ordering example

|              |     |     |
|--------------|-----|-----|
| Product      | MFK | 200 |
| Dimension Ød |     |     |